



REFERENCE LIST
EUROPE

ESTONIA (Fence Painting)

City:Talin




Installation year:2021

Delivery method: Turnkey



1.2 m/min Auto. Powder Coating Line with Pretreatment

- 3 stage Pretreatment (Degreasing process)
- 12 m Drying Oven
- 13 m U-Turn Oven
- Fast Color Change Automatic Booth with PM3
- Y2 Cardanic Conveyor line (100 kg/load)
- Electron Auto. & Manual Powder Coating Equipment

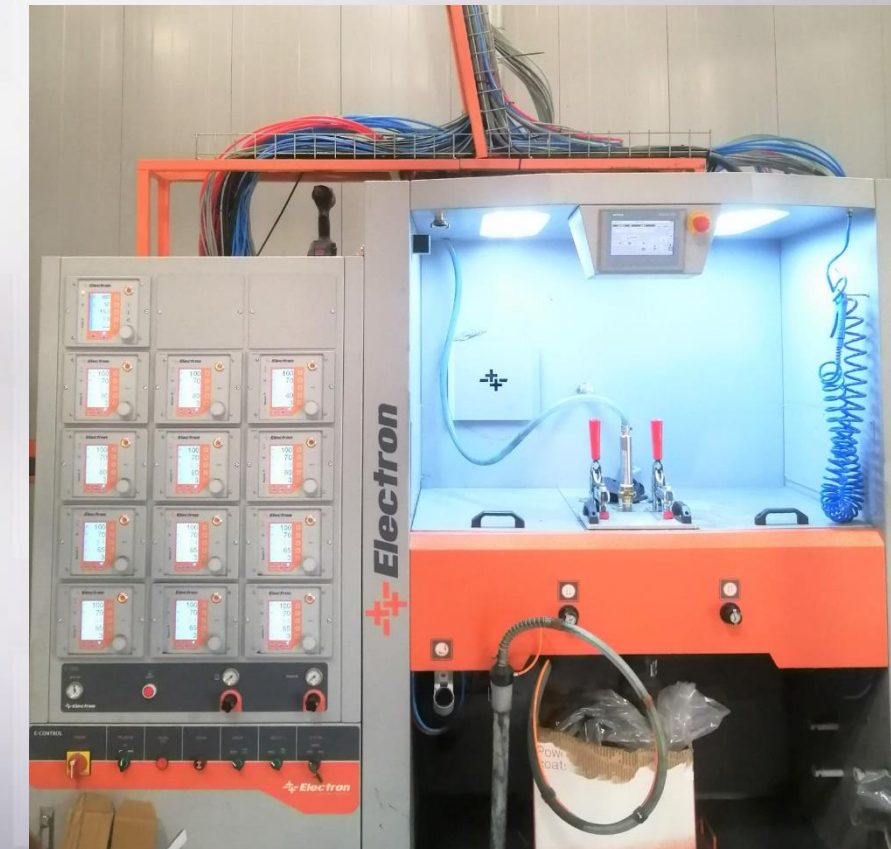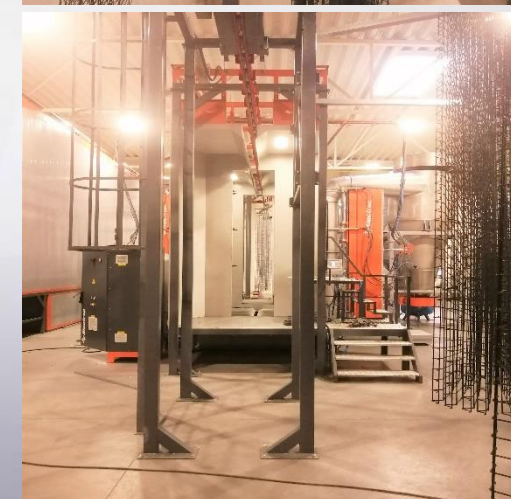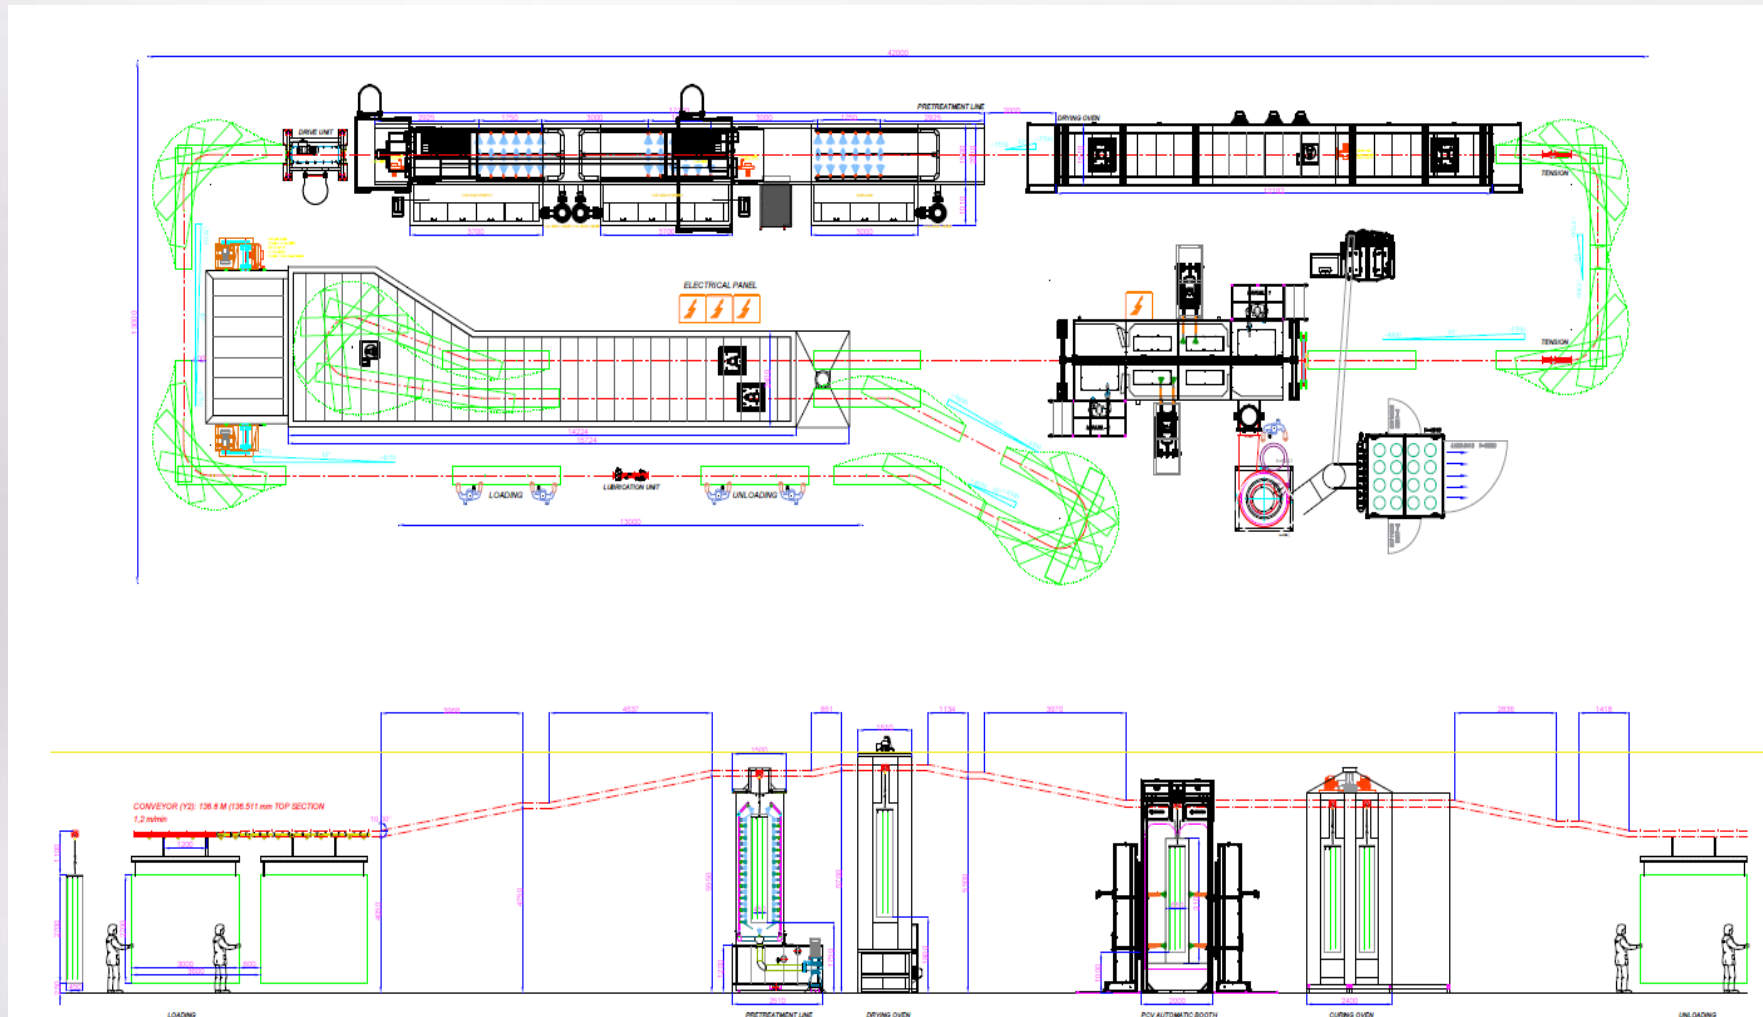

SPAIN (Job Coater)

City: Barcelona-Alicante


Installation year: 2022

Delivery method: Turnkey



Quick Color Change PVC Booth

- Electron Robot 1500mm Stroke
- E-Coat Master Automatic Equipment
- E-Coat Master Manual Equipment
- E-FEED PM2 Powder Management Center
- Device cabinet with automation

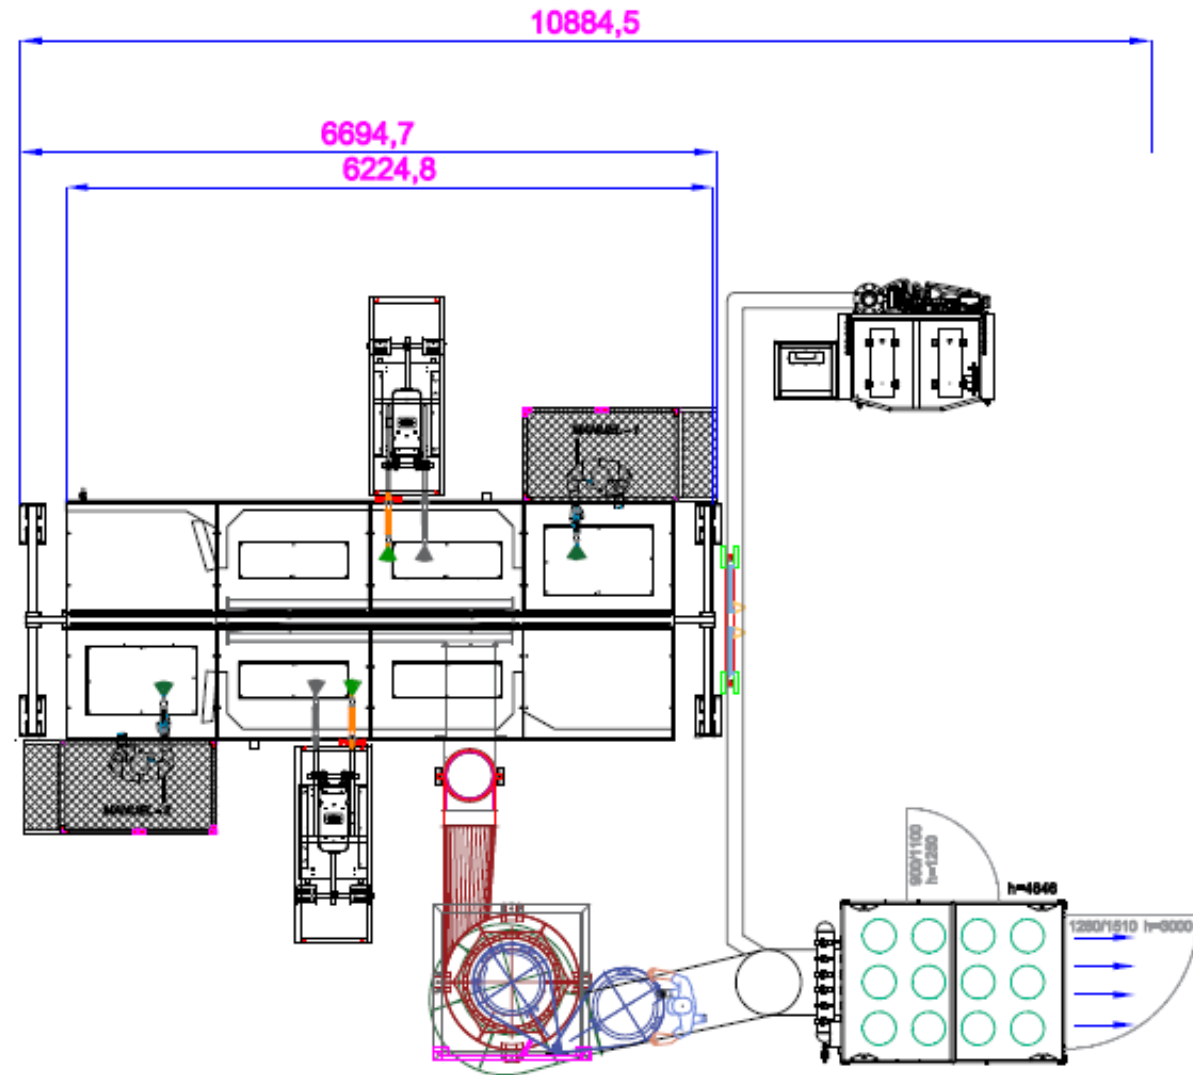

SWEDEN

(Job Coater for Small Products)

City: Anderstorp





Installation year: 2022

Delivery method: Turnkey



Bar Transfer System Manuel

- Bar transfer oven 3.5 meter
- FK-5 Filter Booth-2 pieces
- 2 Collectors and 5 rails

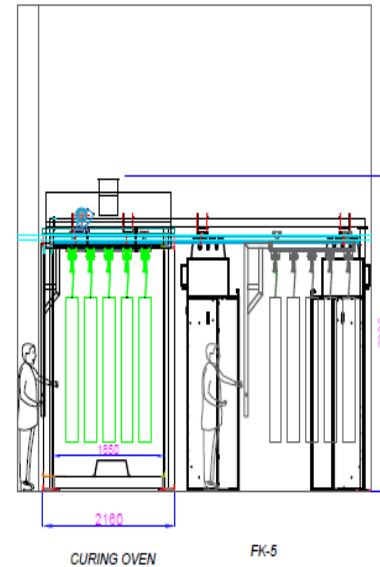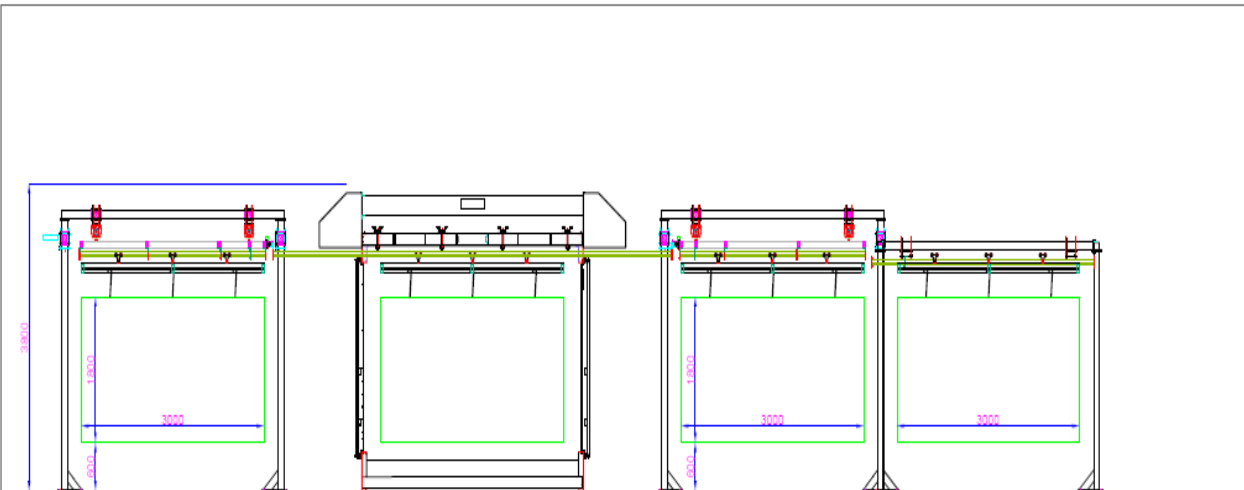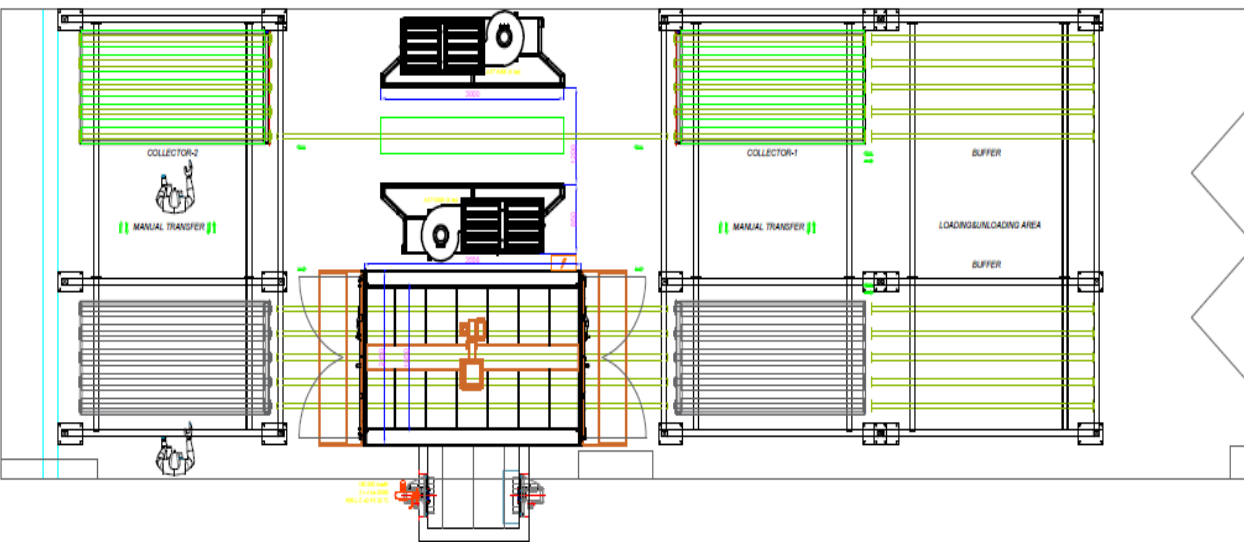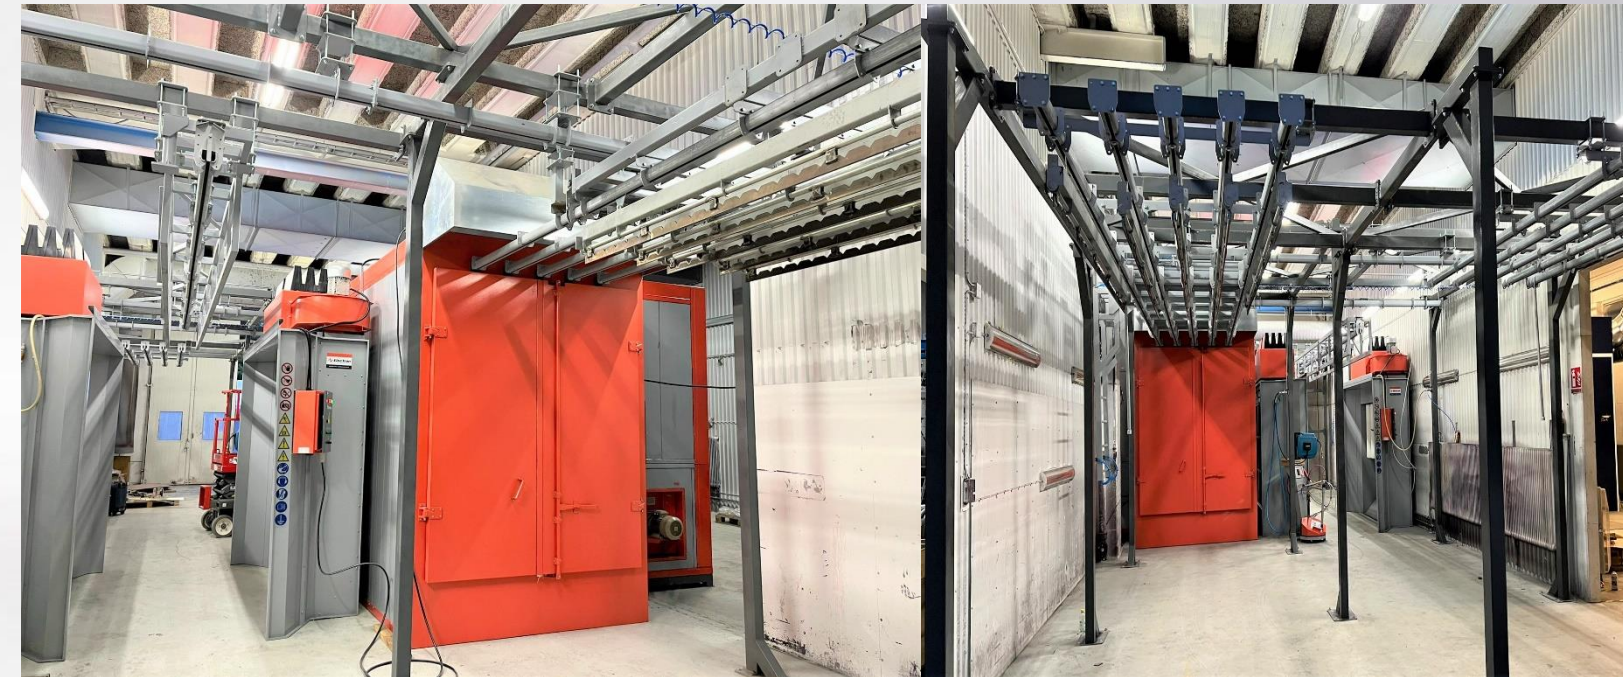

FINLAND (Job Coater)

City: Kauhava


Installation year: 2023

Delivery method: Turnkey



1.5 m/min Automatic Line with Pretreatment

- 5 stage pretreatment(Nano coat process)
- Drying oven
- Quick color change PVC Booth
- Curing Oven
- Full part detector system
- Y3 Cardanic Conveyor line (200 kg/load)
- Electron equipment

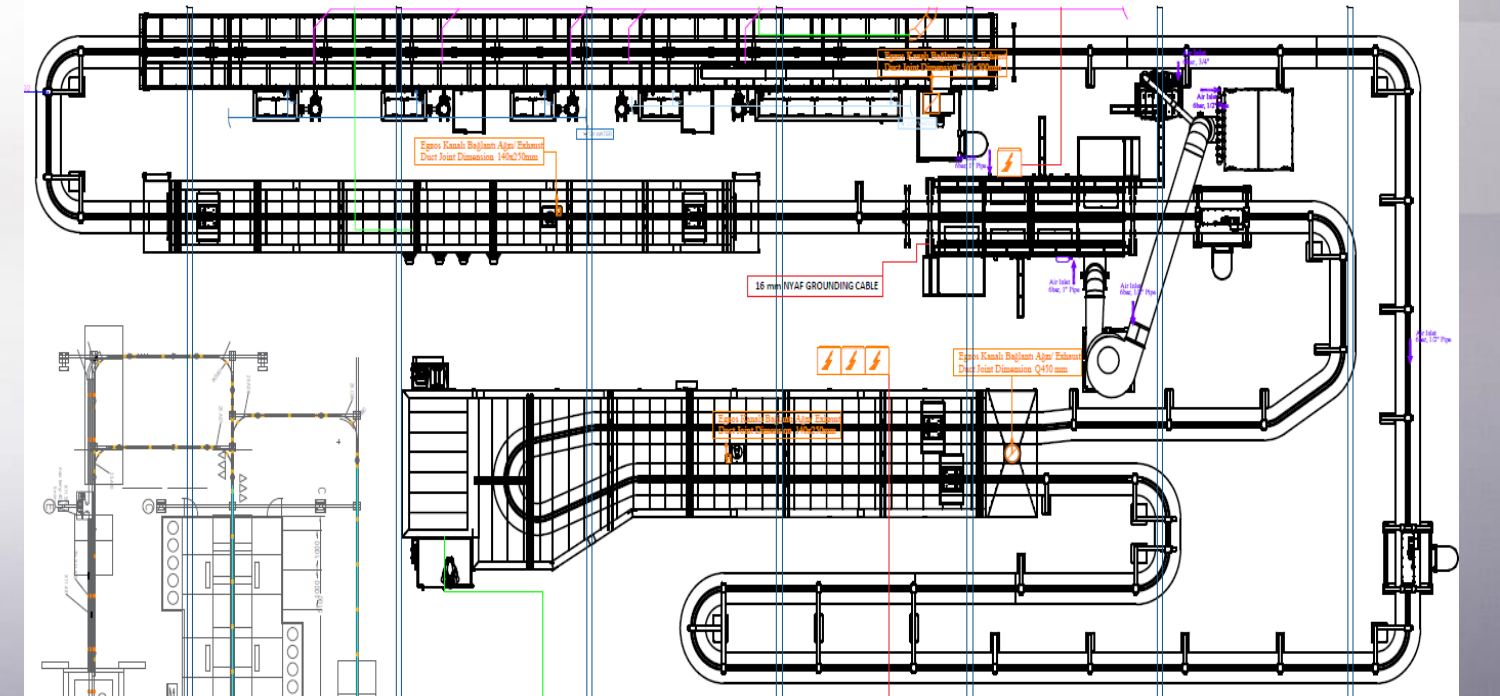


SPAIN (Job coater)

City: Madrid

Installation year: 2023

Delivery method: Turnkey

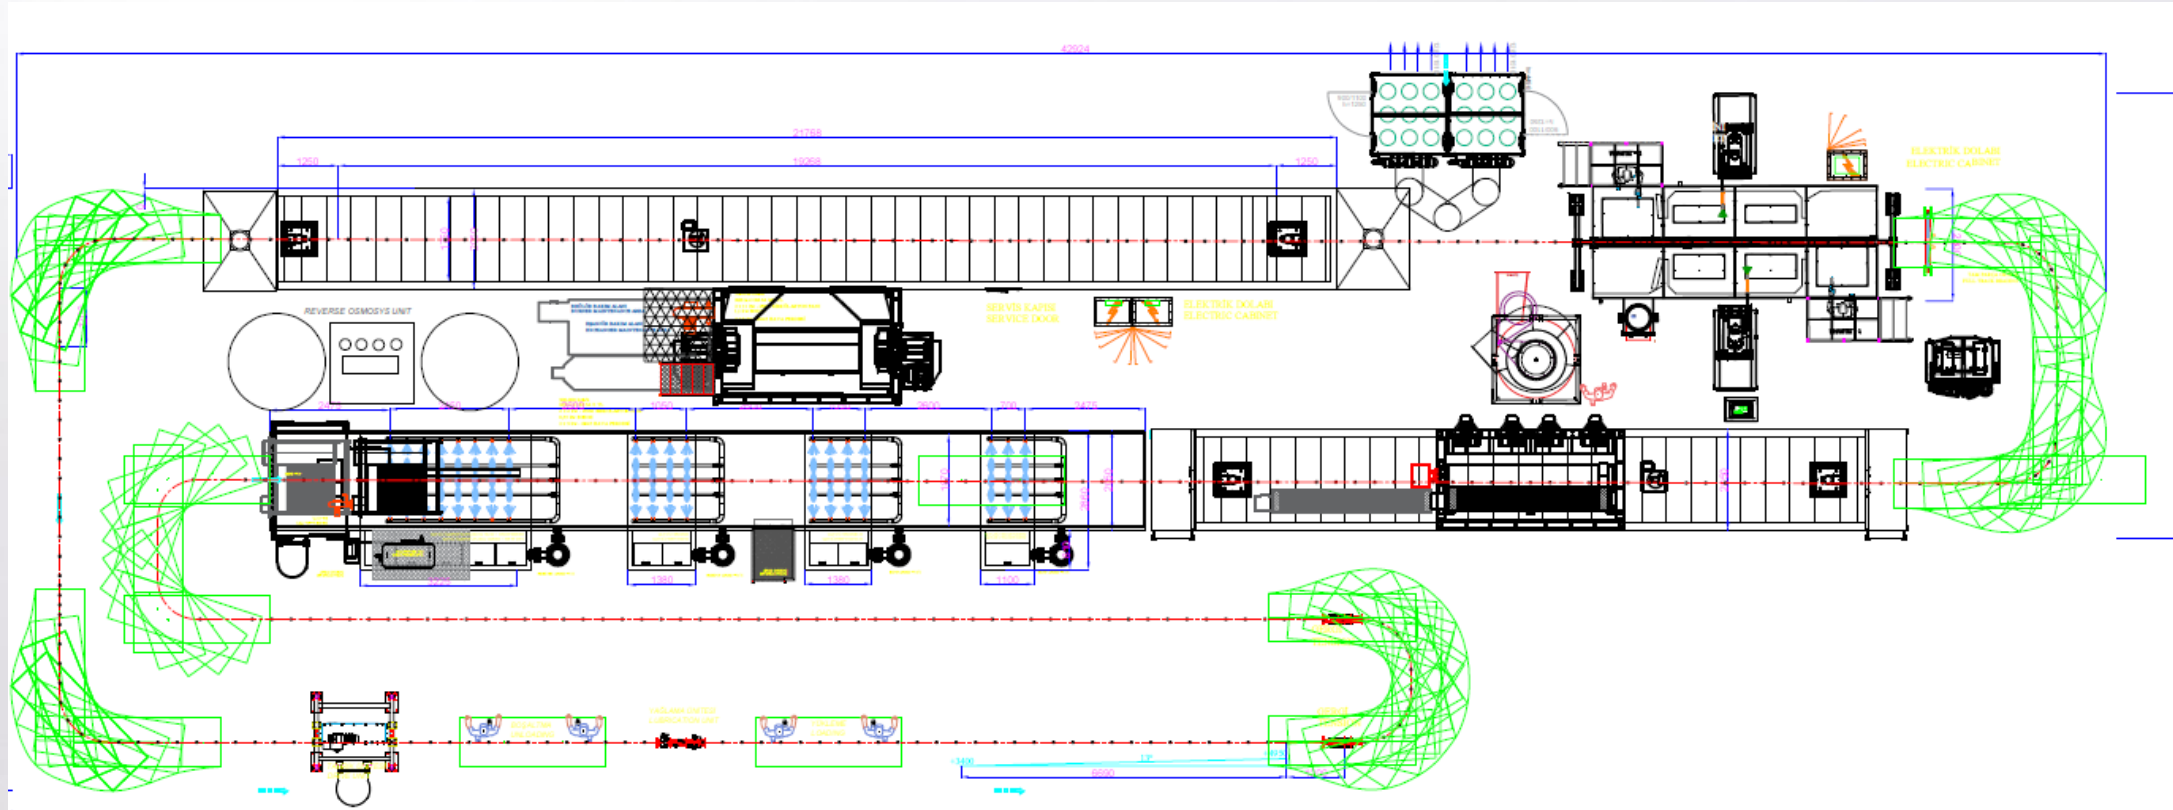

1 m/min Auto. Powder Coating Line with Preatreatment

- 4 stage pretreatment (Degraining&Phosphating)
- Drying oven
- Quick color change PVC booth
- Curing oven
- Y3 Cardanic conveyor
- Electron equipment

GERMANY (Aluminum Profile)

City: Cloppenburg


Installation year: 2023

Delivery method: Turnkey



1.2 m/min Auto. Powder Coating Line with Pretreatment line

- 12 m U-Turn Curing Oven
- Y1 Cardanic Conveyor
- SS Made Automatic Powder Booth
- Electron Equipment
- 3 Stages pretreatment (Degraining process)
- Step by step pretreatment

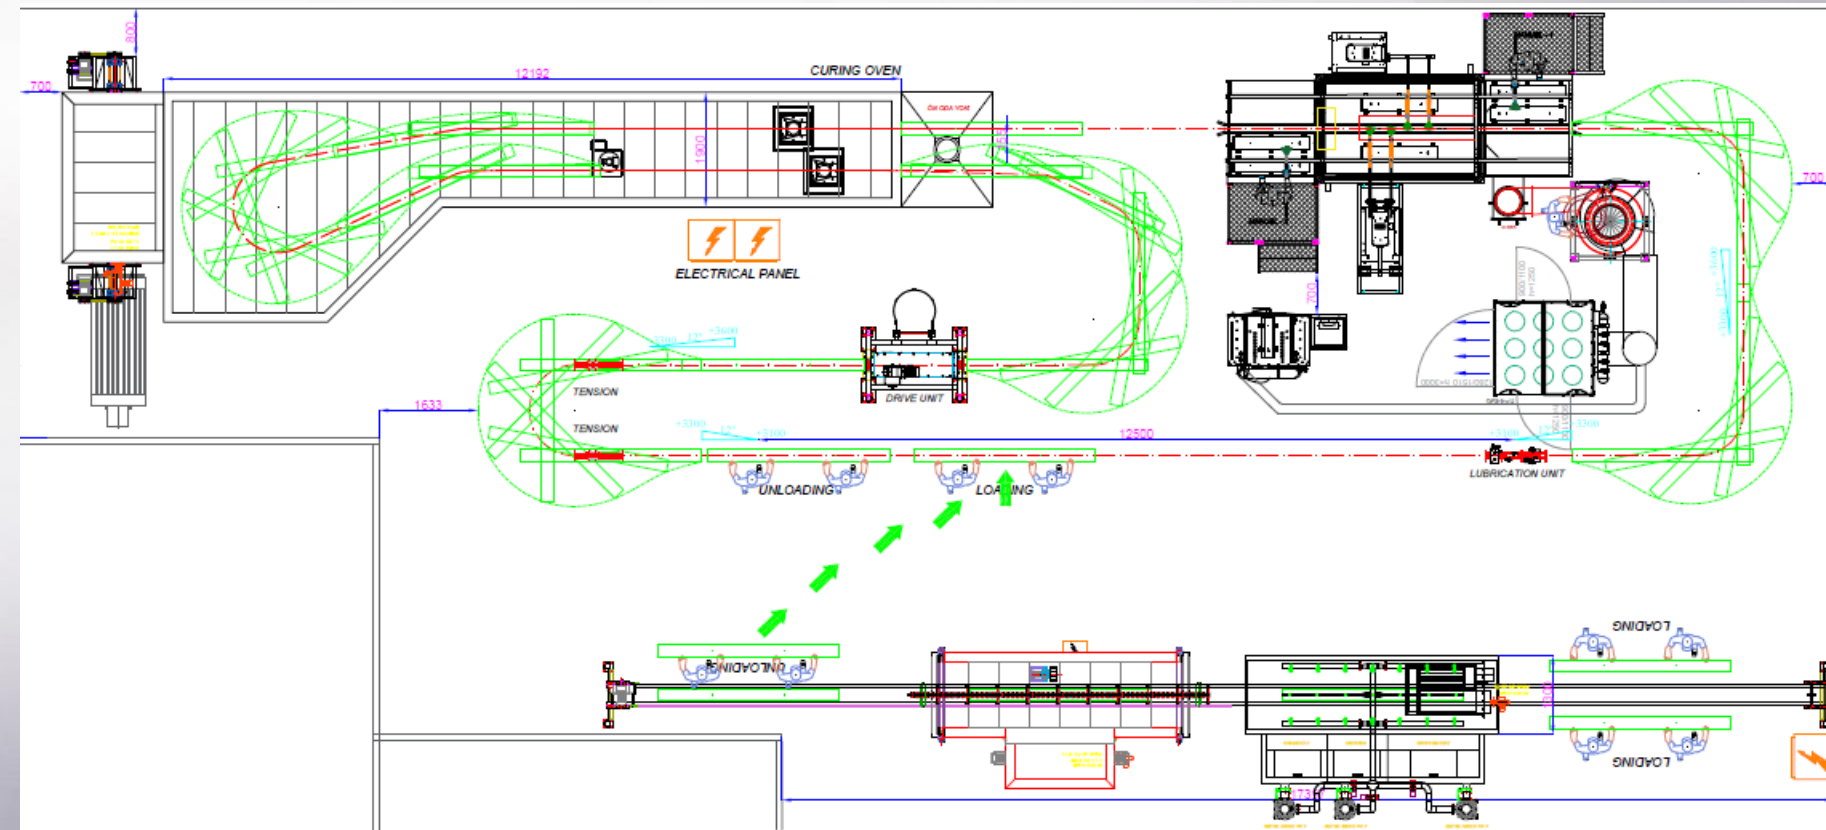

GERMANY (Metal Products)

City: Dortmund


Installation year: 2022

Delivery method: Turnkey



1,1 m/min. Automatic Line With Pretreatment

- 3 stage of washing line(Degreasing Process)
- 12 meter Drying oven
- Quick color change PVC Booth
- U-Type Curing oven-12 Meter
- PLC electrical Panel
- Electron Equipment
- Y2 Cardanic Conveyor

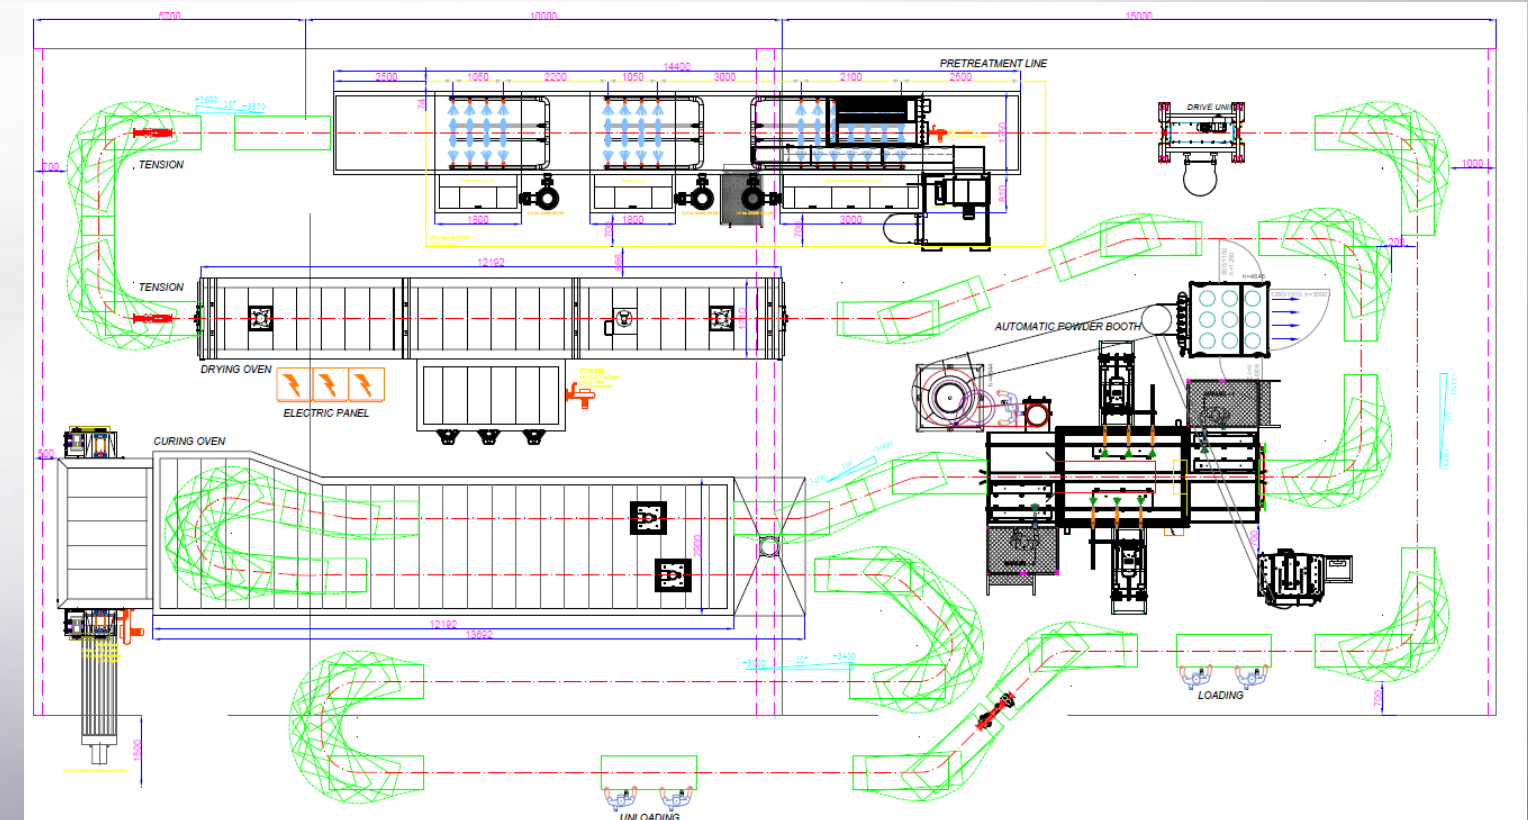

CZECH REPUBLIC (Aluminium Profile)

City: Praha





Installation year: 2019

Delivery method: Turnkey



Bar Transfer System With Automatic Collector

- 6.5 m Curing Oven
- 3 Stage Pretreatment line(Degreasing Process)
- SS Made Automatic Powder Coating Booth
- Electron Equipment

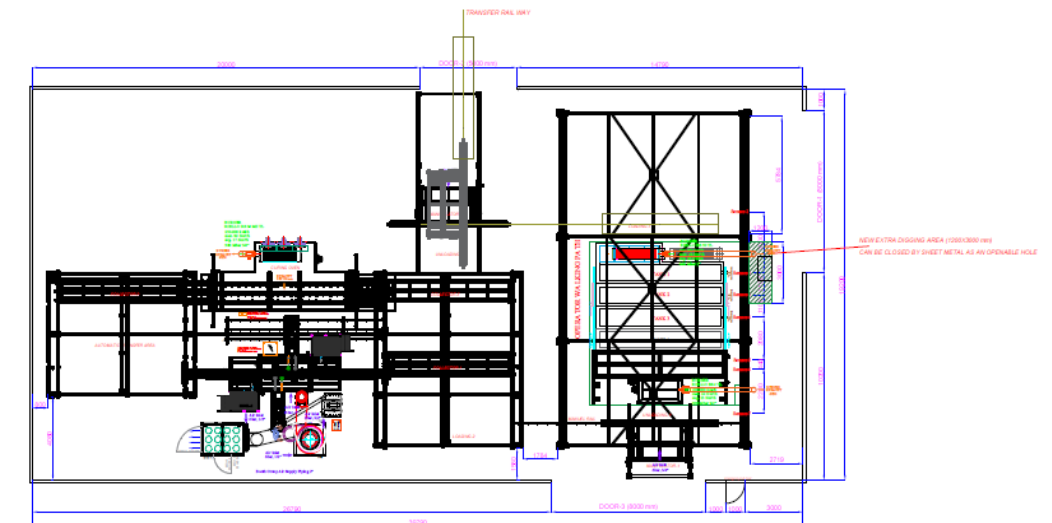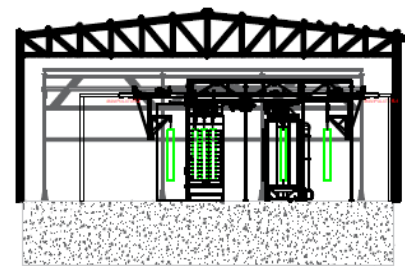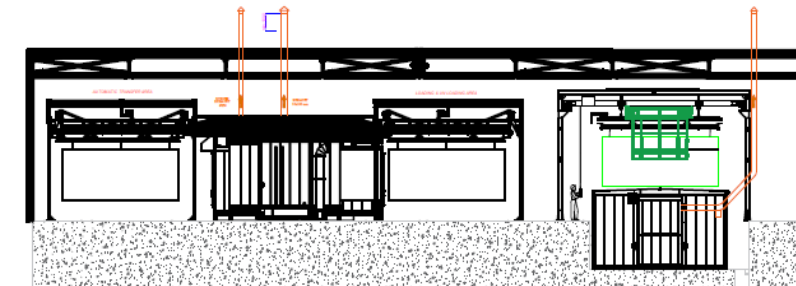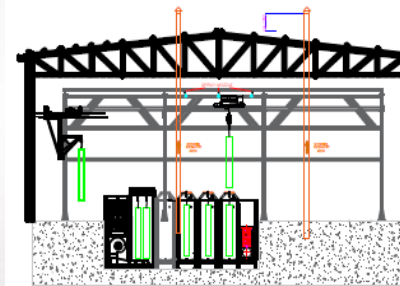

CROTIA (Galvanized Steel)

City: Zagreb


Installation year: 2020

Delivery method: Turnkey



Bar Transfer System with Pretreatment(Dipping)

- 3 Dipping Tanks
- Bar Transfer Oven-7 Meter
- FK-6 Manual Booth
- Electron Equipment

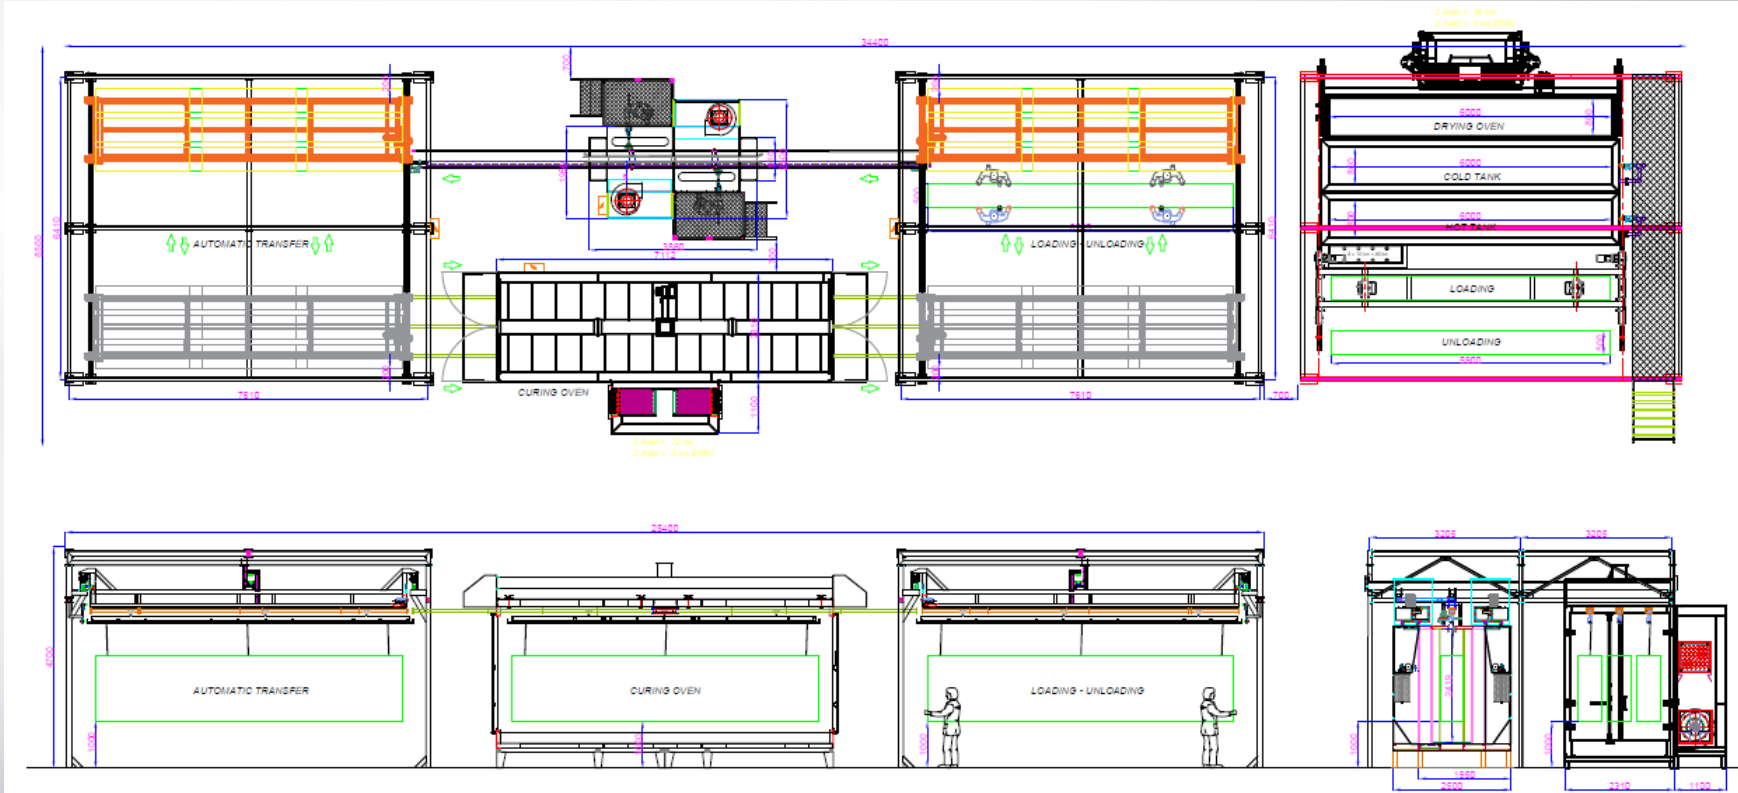

BOSNIA (Pump&Heater)

City: Treninje



Installation year: 2019

Delivery method: Turnkey



Automatic line for Wet Painting with Pretreatment

- 2 stage pretreatment
- Drying oven: Tunnel type
- Wet Painting Curing Oven: U-Type
- Close type Wet Painting Booth
- PLC Control Panel
- Electron Equipment

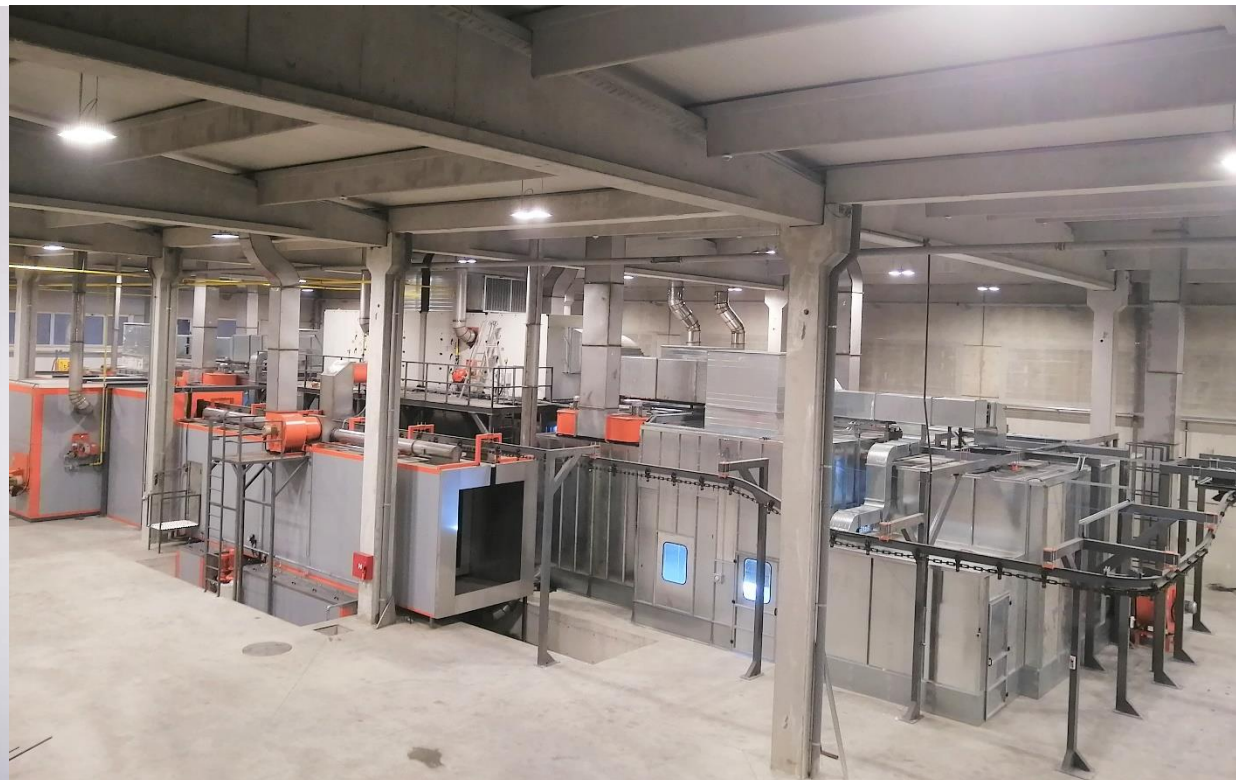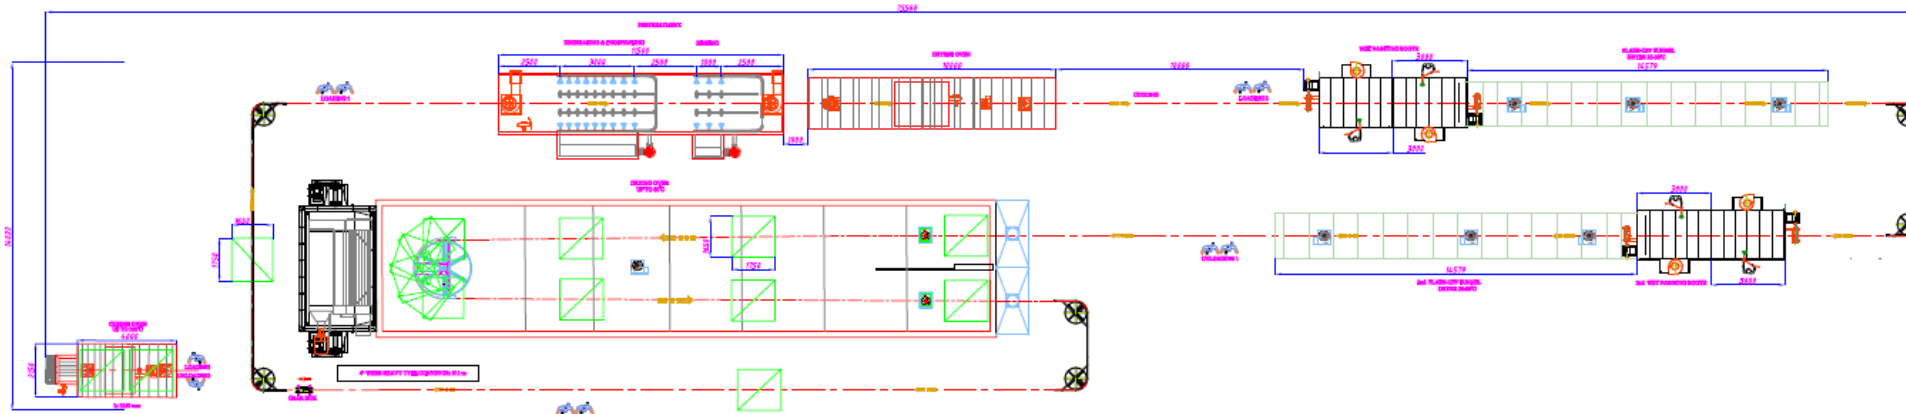

BOSNIA (Pump&Heater)

City: Treninje


Installation year: 2021

Delivery method: Turnkey



2 m/m Automatic line with Pretreatment

- 5 stage pretreatment(Chrome free process)
- Drying oven:Tunnel type
- Curing Oven:U-Type
- Y2 Cardanic Conveyor
- PLC Control Panel
- Electron Equipment

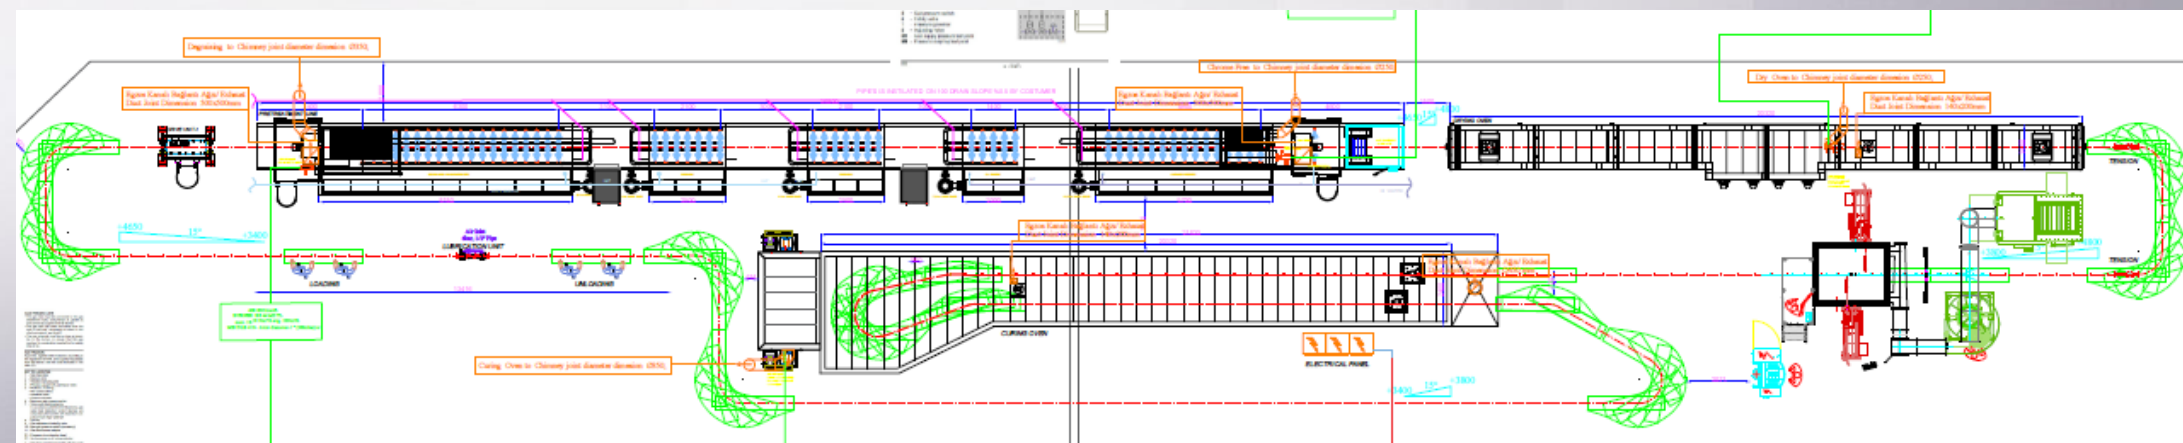

HUNGARY (Aluminium Parts)

City: Budapest


Installation year: 2019

Delivery method: Turnkey



0,8 m/m Automatic line with Pretreatment

- 3 stage pretreatment(Degreasing process)
- Drying oven:Tunnel type
- Curing Oven:U-Type
- SS Made Booth
- PLC Control Panel
- Electron Equipment

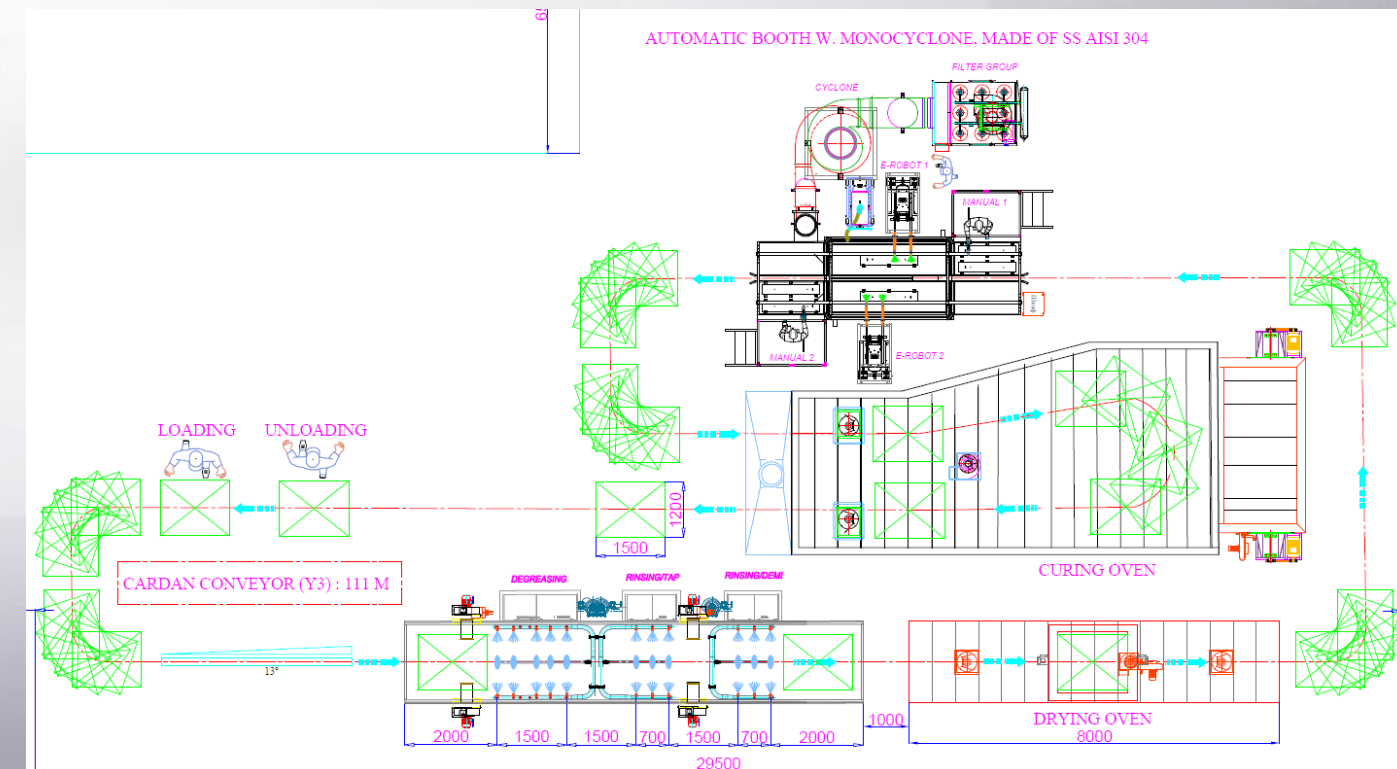

HUNGARY (Metal Profile)

City: Budapest


Installation year: 2021

Delivery method: Turnkey



1,2 m/m Automatic line with Pretreatment

- 3 stage pretreatment(Degreasing process)
- Drying oven:Tunnel type
- Curing Oven:Tunnel Type
- SS Made Booth
- PLC Control Panel
- Electron Equipment

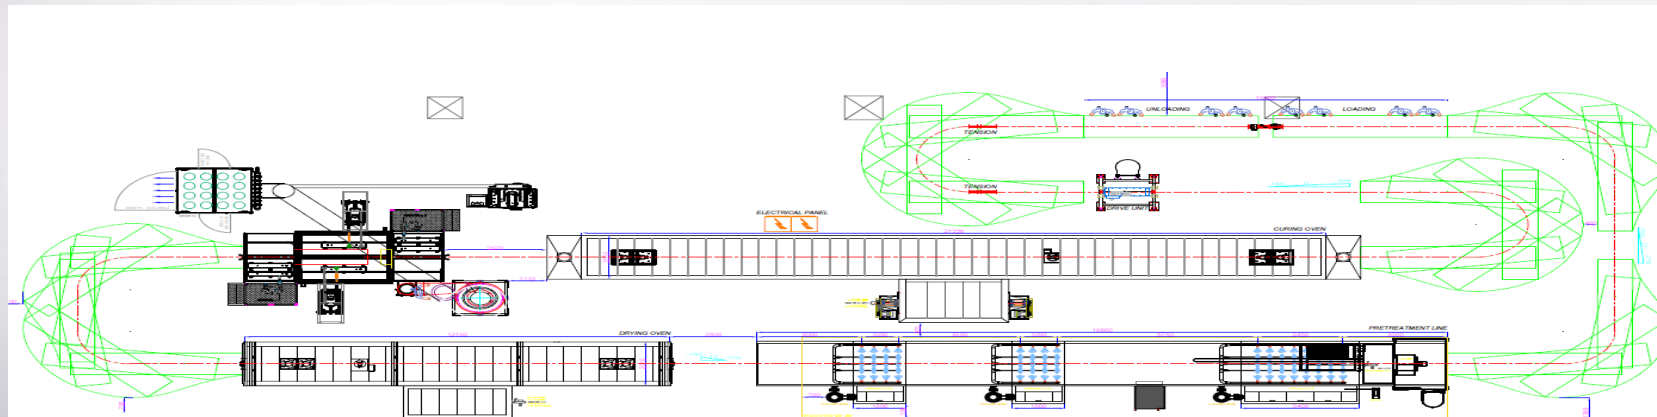

BOSNIA (Aluminum Pipe)

City: Pristine


Installation year: 2022

Delivery method: Turnkey



1 m/m Automatic line with Pretreatment

- 2 stage pretreatment(Degreasing-Phosphate process)
- Drying oven:Tunnel type
- Curing Oven:Tunnel Type
- Quick Color Change PVC Booth
- PLC Control Panel
- PM3 Powder Management Center
- Electron Equipment

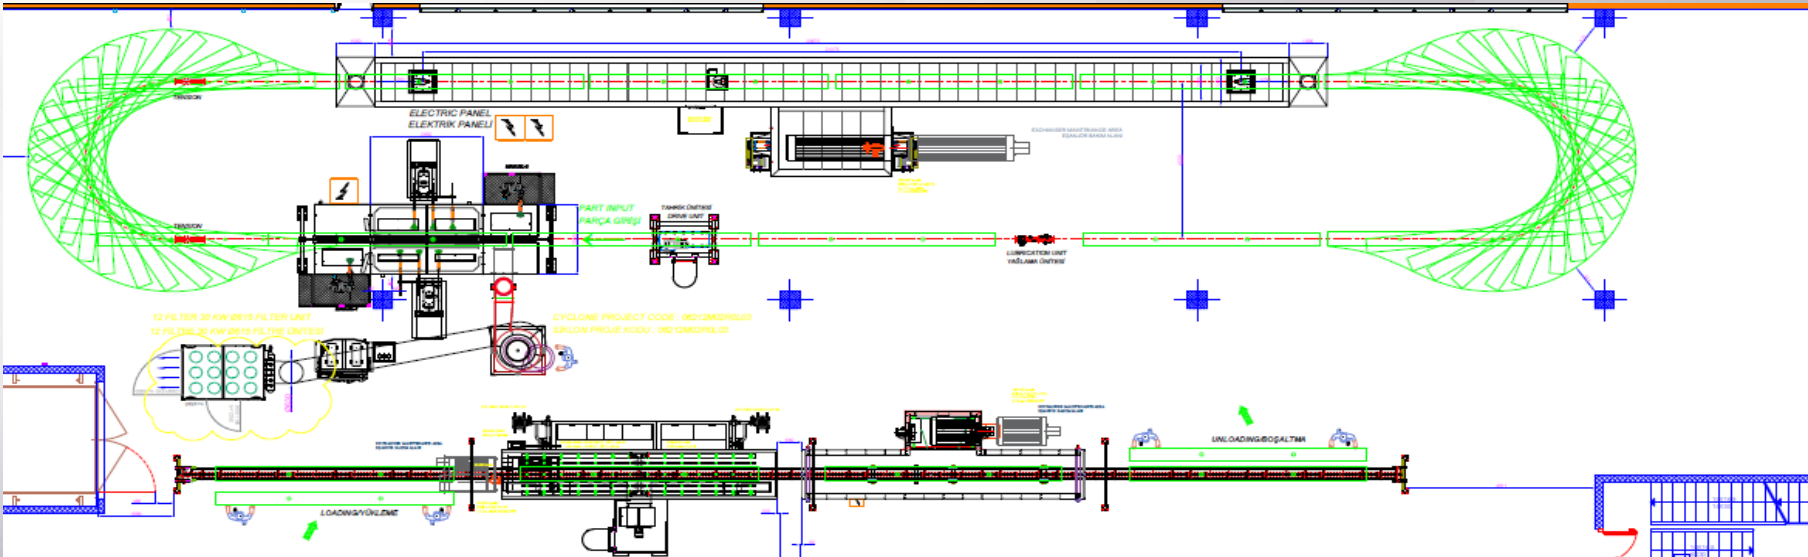


Romania (Pipe Coating)

Country: Romania


Installation year: 2023

Delivery method: Turnkey

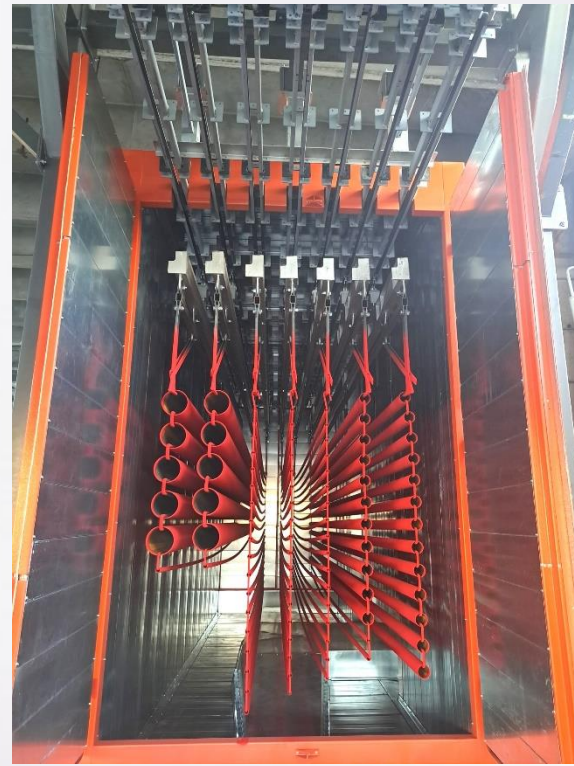

Bar Transfer System with buffer zone

- Curing Oven: Tunnel Type
- Stainless Steel Automatic Powder Booth
- Automatic Collectors
- PM1 Powder Management Center
- Electron Equipment

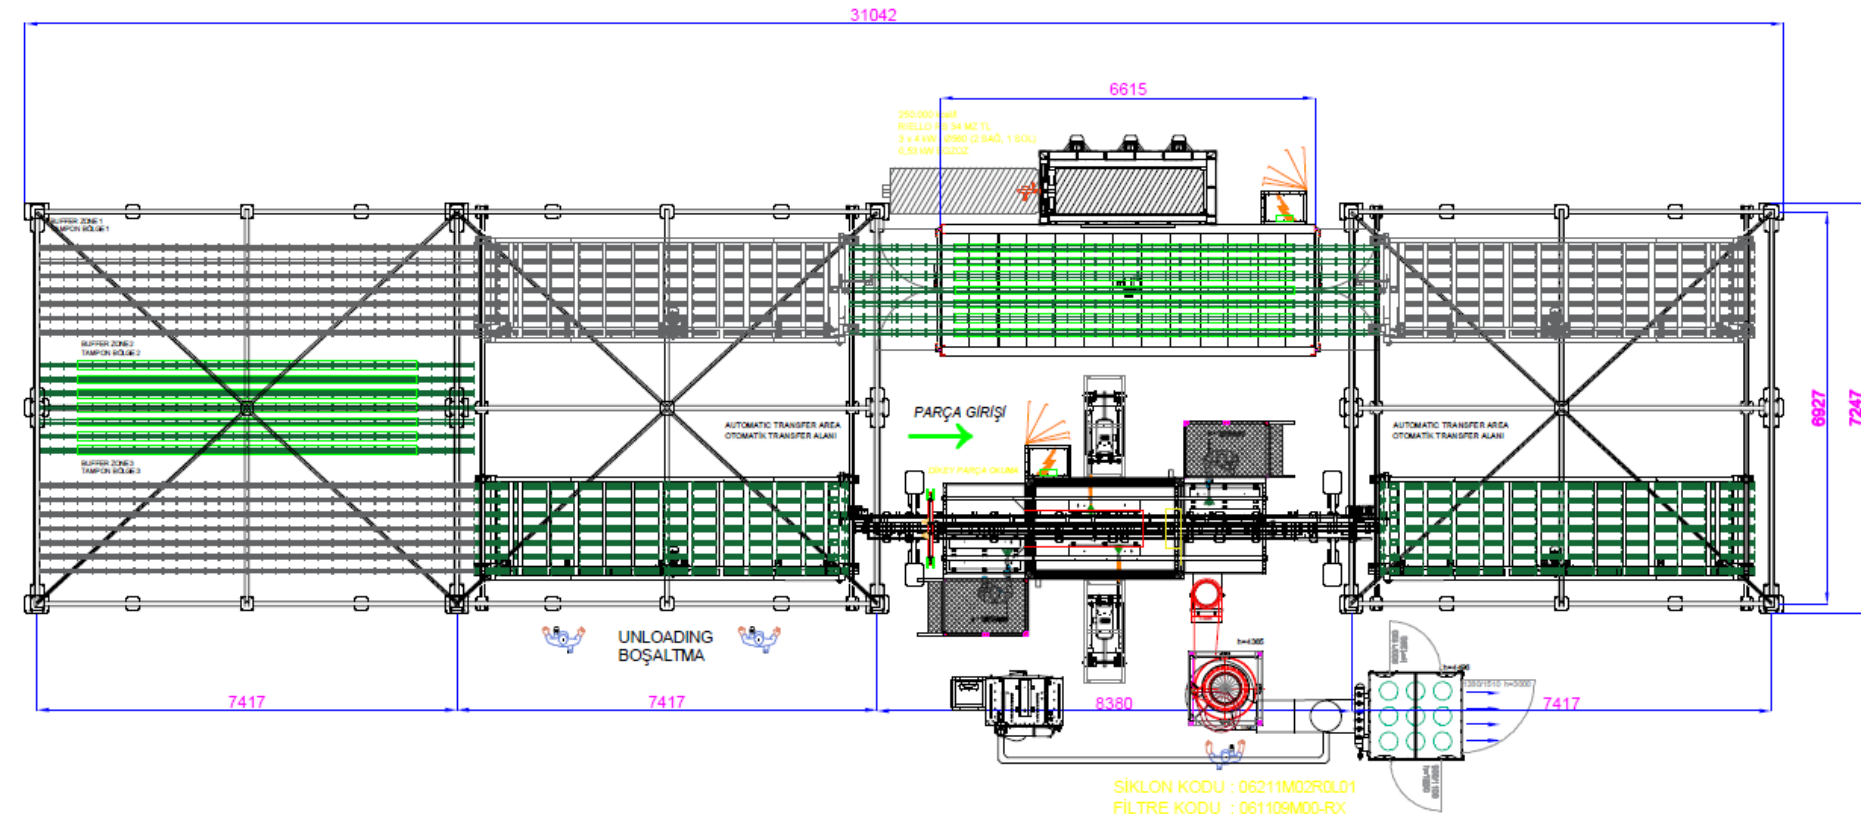

HUNGARY (Metal Sheet)

Country: Hungary


Installation year: 2023

Delivery method: Turnkey



1.2 m/m Automatic line with Pretreatment

- 3 stage pretreatment (Degreasing-Phosphate process)
- Drying oven: Tunnel type
- Curing Oven: Tunnel Type
- Stainless Steel Automatic Booth
- PLC Control Panel
- PM1 Powder Management Center
- Electron Equipment

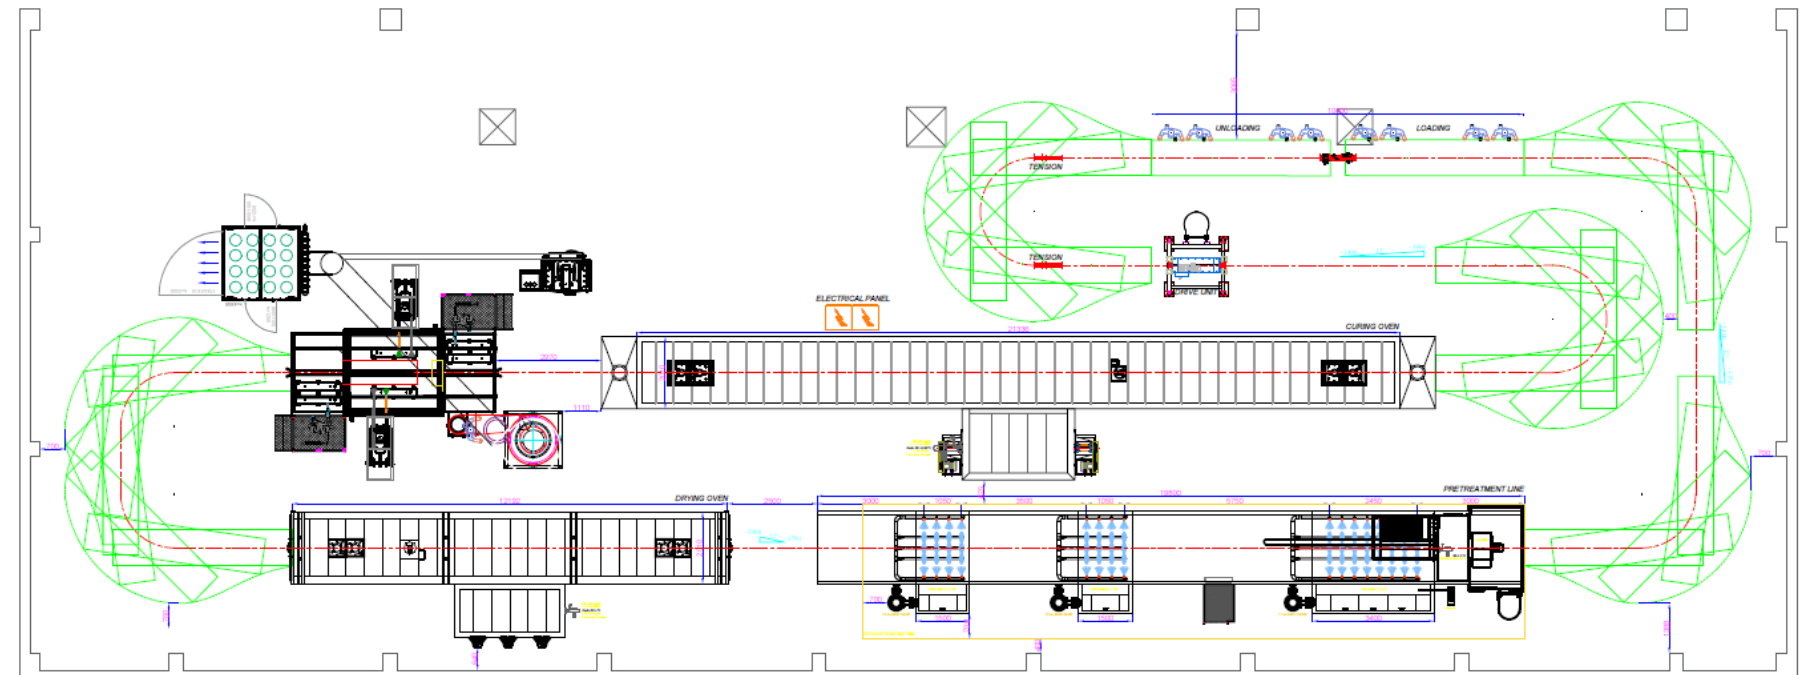

SPAIN (Escalator)

City: Zaragoza



Installation year: 2024

Delivery method: Turnkey



QUICK COLOR CHANGE PVC BOOTH

- Automatic PVC Booth
- Electron Reciprocators
- PM3 Powder Management Center
- Electron Equipment

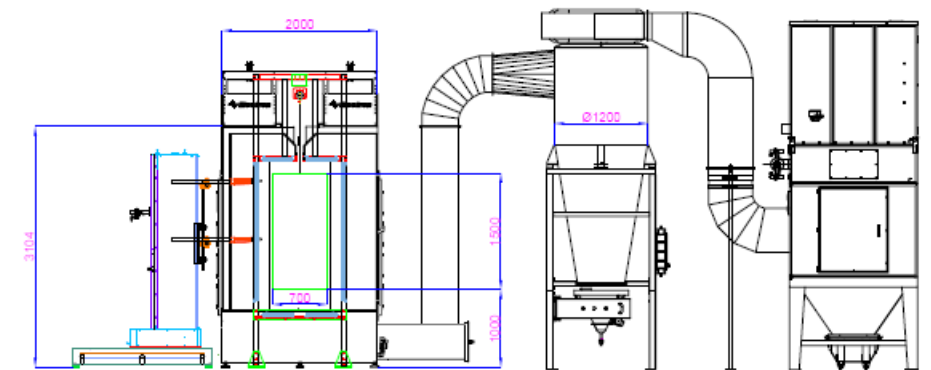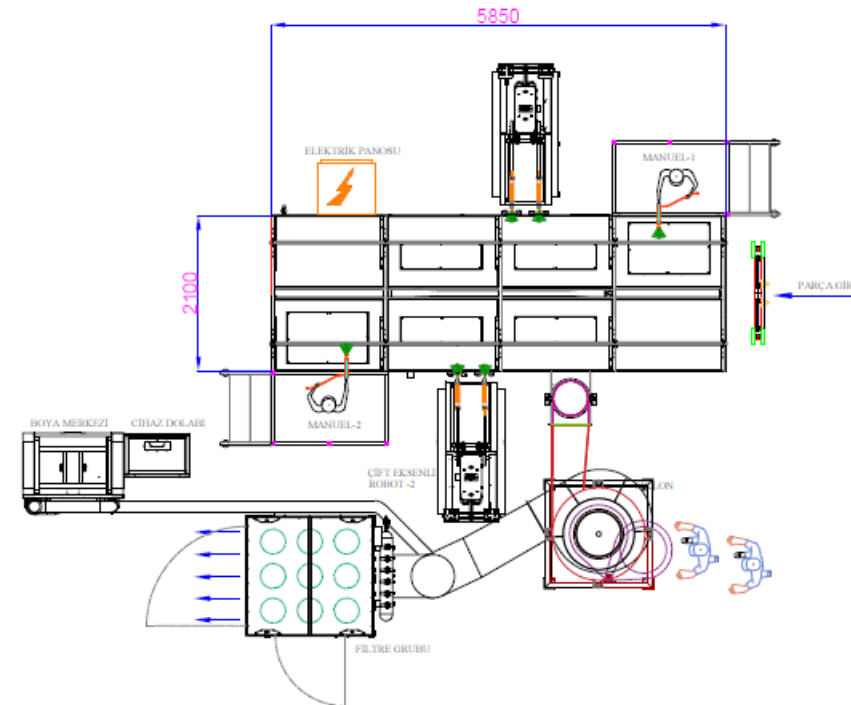

Moldova (Shelf pole)

City: Kişinev


Installation year: 2023

Delivery method: Turnkey



Power&Free

- Curing Oven: Z Type
- Drying Oven: Tunnel Type
- PVC Automatic Powder Booth
- 5 Stage Pretreatment
- PM2 Powder Management Center
- Electron Equipment
- Power&Free Conveyor

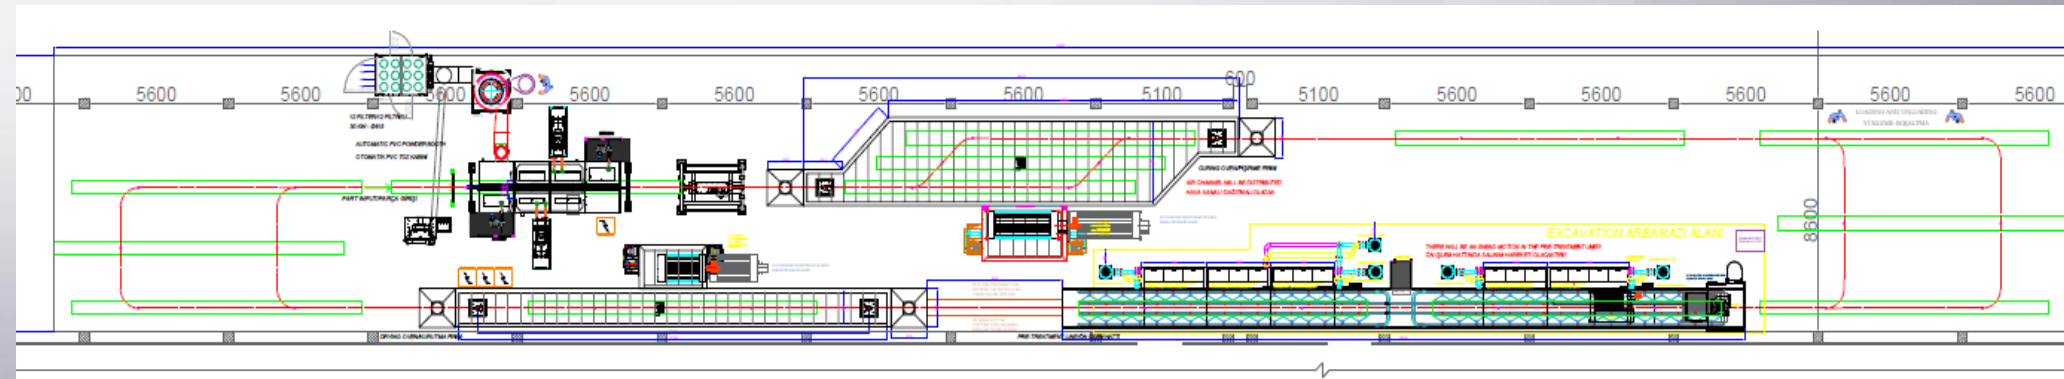

BOSNIA (Job Coater)

City: Mostar


Installation year: 2023

Delivery method: Turnkey



1.7 m/m Automatic line with Pretreatment

- 5 stage pretreatment
- Drying oven: Tunnel type
- Curing Oven: U Type
- Quick Color Change PVC Booth
- PLC Control Panel
- PM2 Powder Management Center
- Electron Equipment
- E-FEED HD Pump

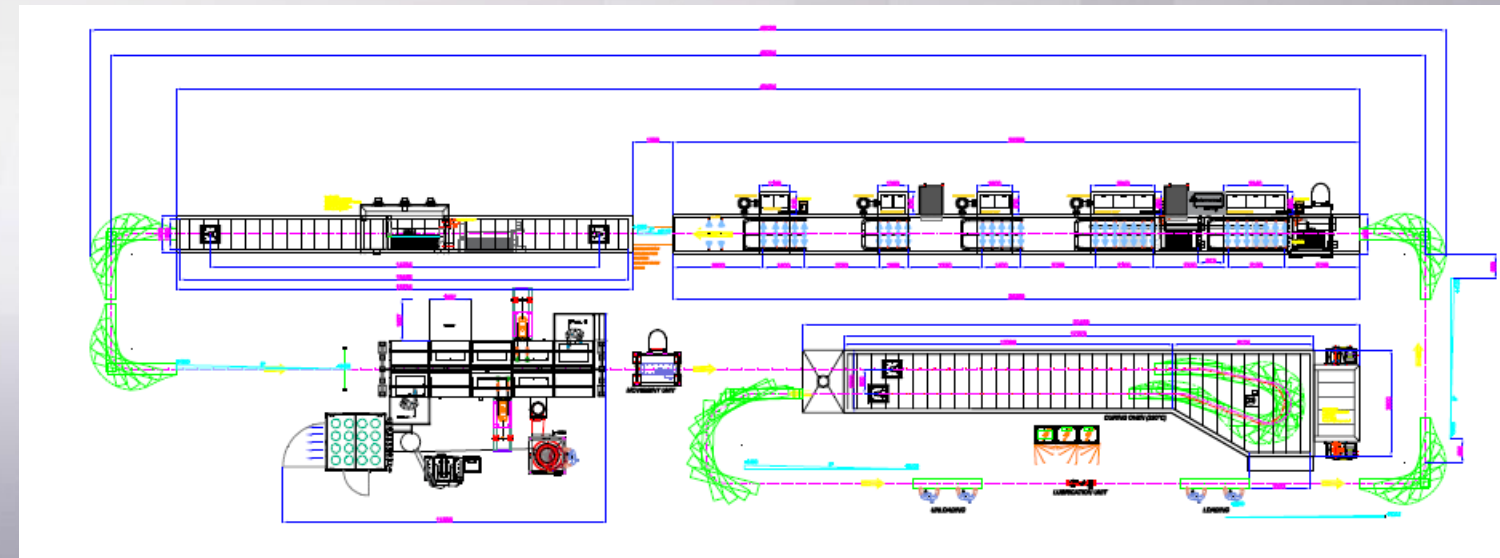

SPAIN (Chimney)

City: Barcelona


Installation year: 2024

Delivery method: Turnkey



1 m/m Automatic line with Paint Booth

- Curing Oven: Tunnel Type
- Quick Color Change PVC Booth
- PLC Control Panel
- PM2 Powder Management Center
- Electron Equipment
- Part Detection System
- E-FEED HD Transfer Pump

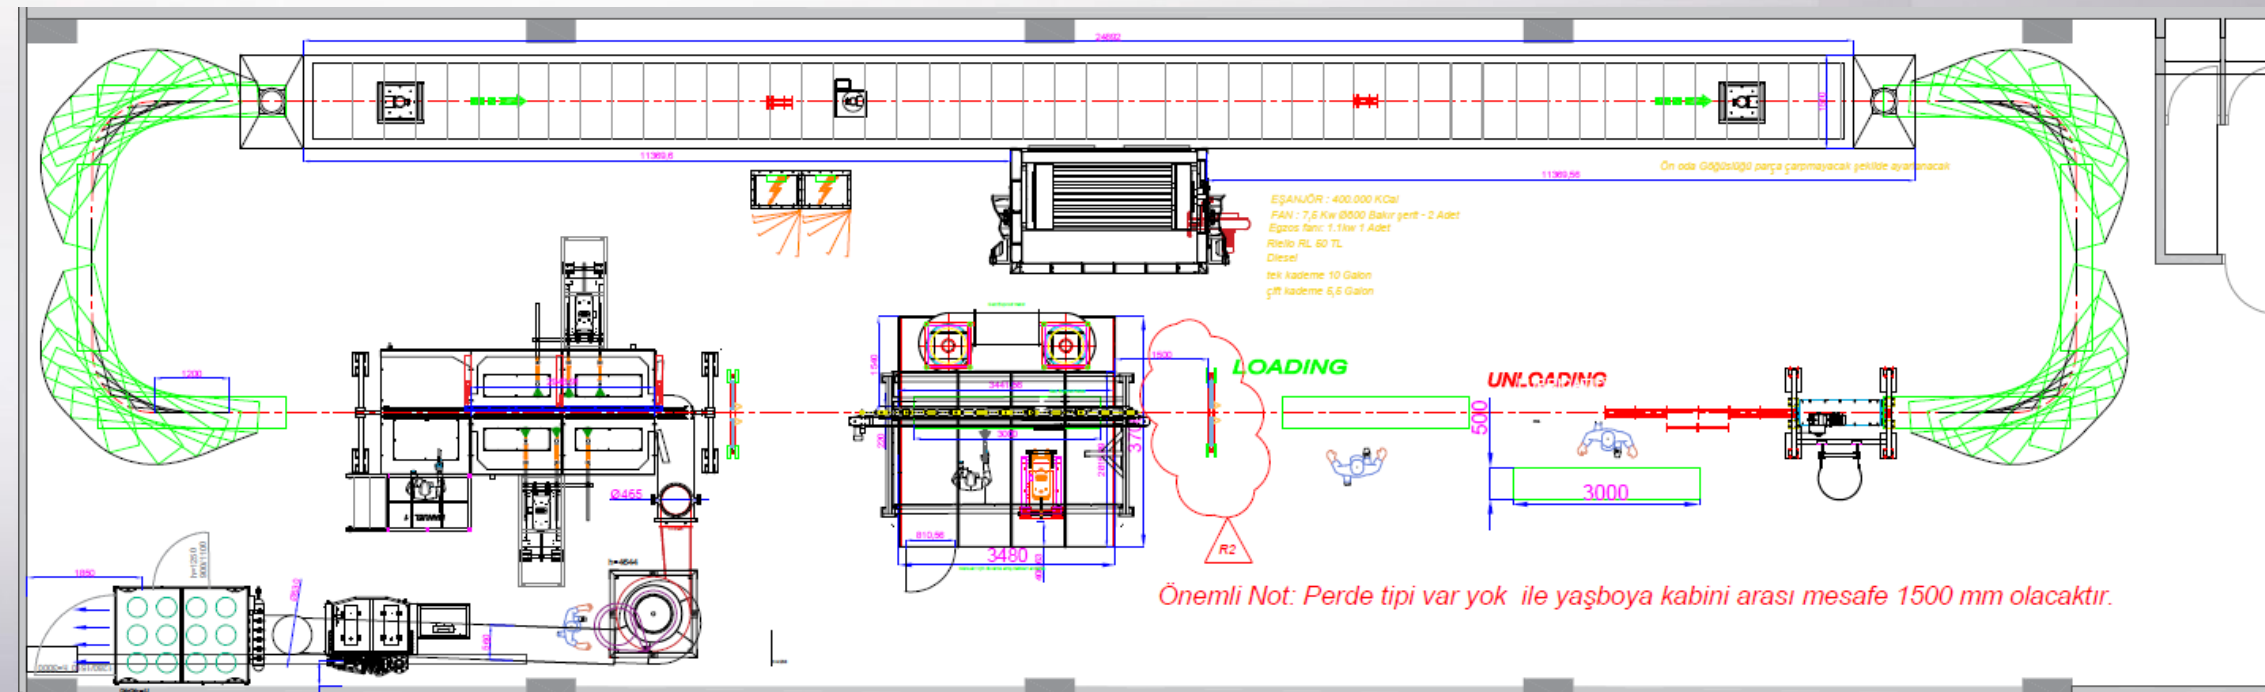

CZECHIA

(Kitchen Equipment)

Country: Czechia



Installation year: 2023

Delivery method: Turnkey



Bar Transfer System Manuel with Buffer Zone

- Bar transfer oven 7 meter
- 2 Collectors and 5 rails
- Loading and Unloading area
- Closed Type Paint Booth
- Manuel Transfer
- Electron Equipment

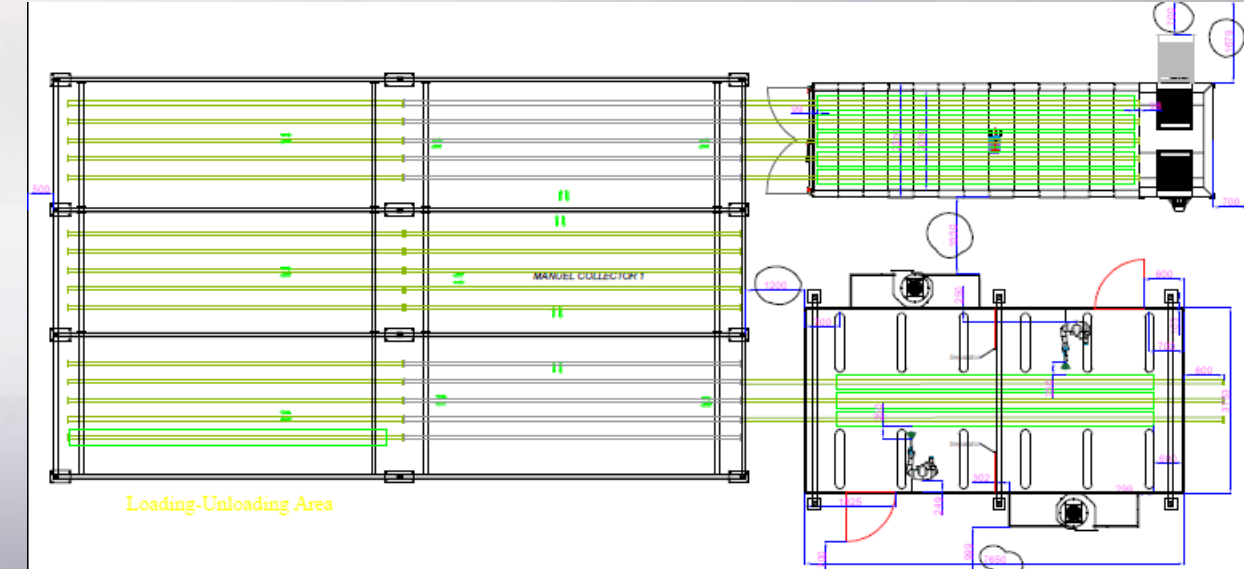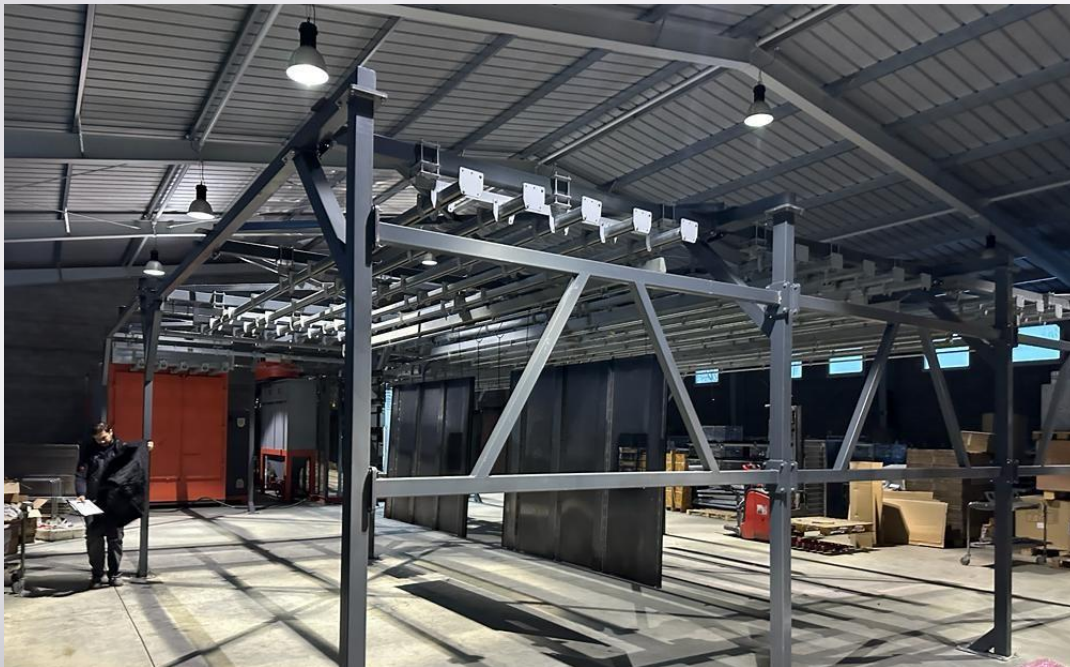

Serbia (Aluminum profile)

Country: Aleksinac

Installation year: 2023

Delivery method: Turnkey



Small Manual System With Rails

- Bar transfer oven 6 meter
- Open Type FK-5 Booth
- Manuel Transfer
- 3 Rails
- Electron Equipment



BOSNIA (Job Coater)

City: Mostar



Installation year: 2023

Delivery method: Turnkey



1.m/m Automatic line with

- Curing Oven:U Type
- Quick Color Change PVC Booth
- PLC Control Panel
- PM2 Powder Management Center
- Electron Equipment
- E-FEED HD Pump
- Basic Part Detection System

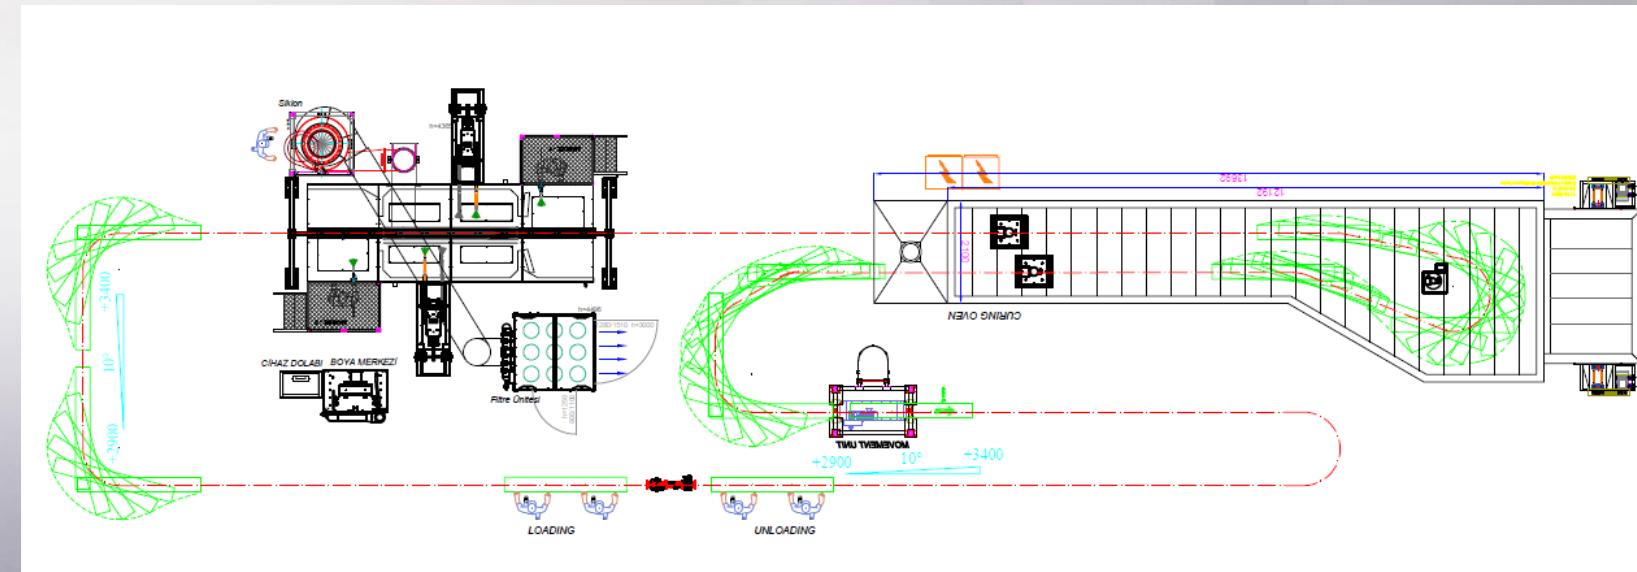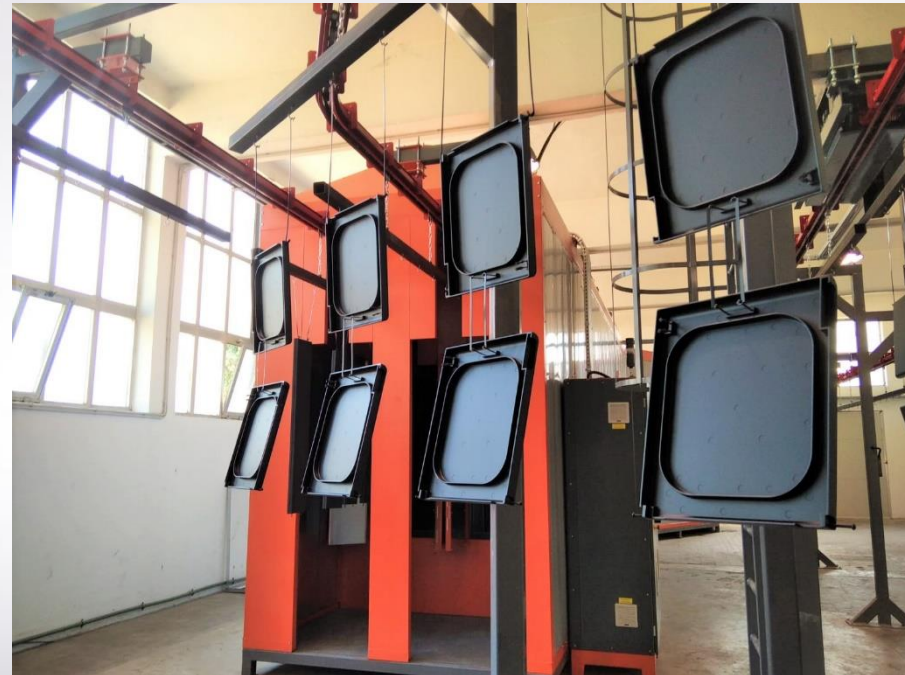

NORWAY (Job Coater)

City: Klepp Stasjon


Installation year: 2023

Delivery method: Turnkey



1.m/m Automatic line with

- Curing Oven:Tunnel Type
- Quick Color Change PVC Booth
- Pretreatment System

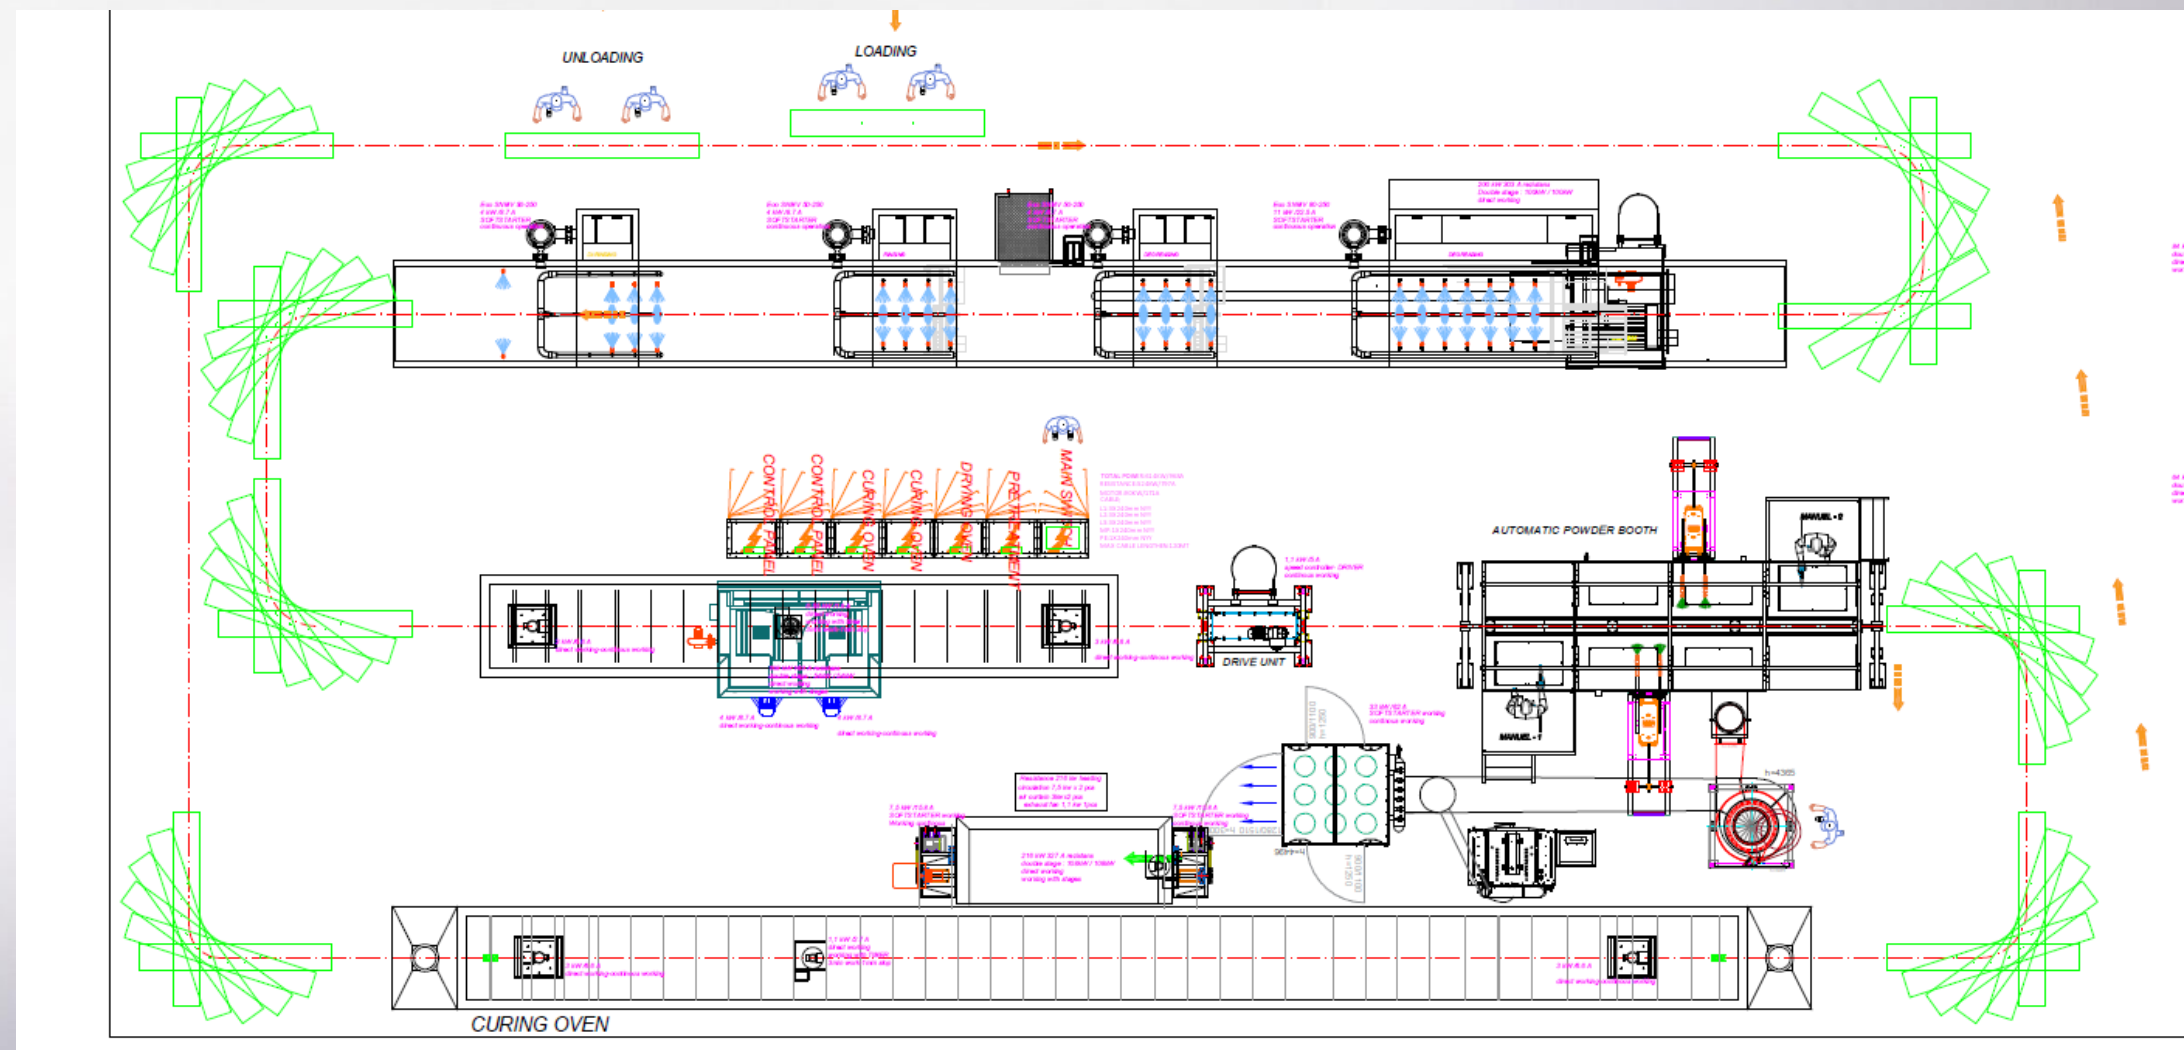



Thank you.